



# STRATO® CASHMERE & TAFFETA

# WALL FINISH PROFESSIONALS



BRICK & STONE VENEER . TEXTURED PAINT . KASTPANEL . ECES . TEXTURE COATING . PEBBLE STONE COATING



# suzuka.com.my

Of suzuka.group | Hotline: +6012-258 7388

Photos of the products shown in this catalogue may vary in color due to lighting

condition & printing. We suggest you examine actual product samples before ordering.







CASHMERE & TAFFETA-E1.1-2401

SINCE 1977





### Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off.

It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

6.5 - 8.5

m²/l/coat

Hard Dry : 5

Surface Dry: 1 Substrate Temperature: 23°C - 26°C Recoating: 5

- Excellent alkaline resistance to prevent efflorescence.
- · Good for new walls and repainting.
- · Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

### Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Airless Spray		
Nozzle <b>1.8 - 2.0</b> mm	Spray Angle Degree 65° - 80°	Pressure 210 psi/150kg/cm <sup>2</sup>





### SCH 001 - 021

Strato® Cashmere embodies the pinnacle of elegance in textured coating. Achieved through smooth layering and delicate craftsmanship, the finished product gives a refined and royal appearance with a lingering hint of sophistication.

### **Appearance**

Low Sheen High Sheen Rough Texture Smooth Texture Metallic

### **Features**



Low VOC



Green Choice, Water Based & Eco-friendly



Formaldehyde & Lead Free



Easy Application & DIY Friendly



Applicable on Ceiling



Maintenance



Slight Metallic


· Interior use only






SCH-008 Eggshell Beige



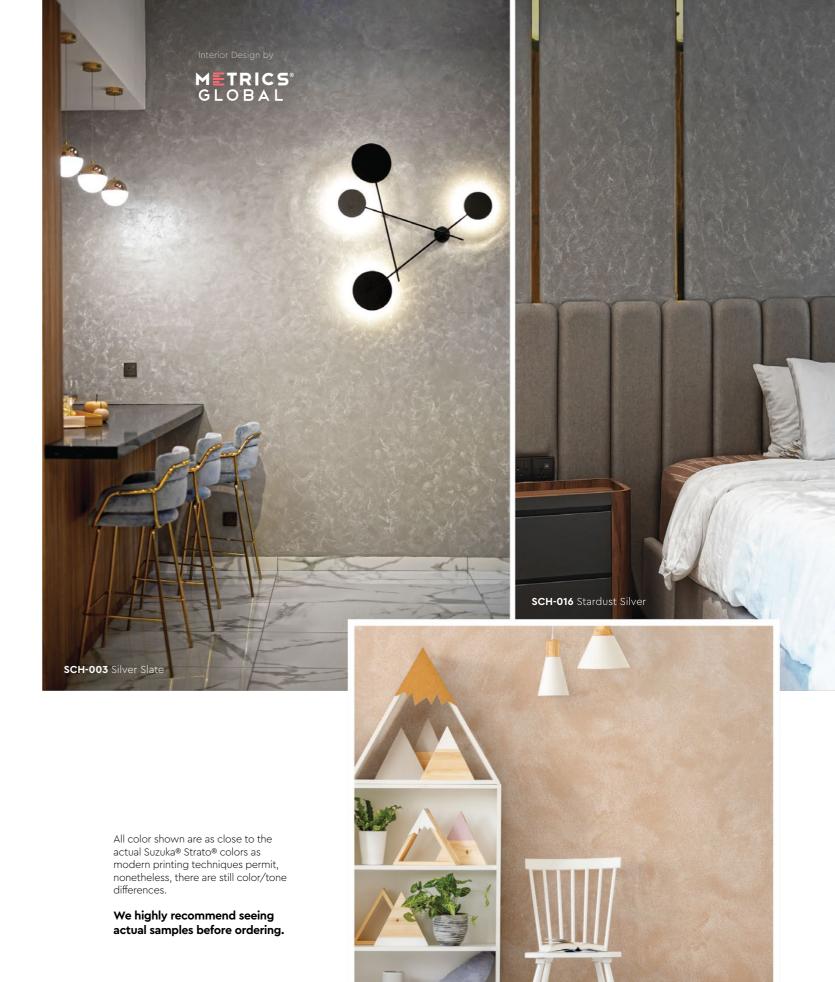

SCH-008 Eggshell Beige





We highly recommend seeing actual samples before ordering.



SCH-010 Honey Yellow



SCH-011 Peach Blossom



SCH-012 Plum Sunset



SCH-013 Baby Doll Pink



SCH-014 Coral Blush




SCH-015 Powder Blue



SCH-016 Stardust Silver



SCH-017 Lace blue



SCH-018 Ash Grey





### Strato® Cashmere

# Application Technique



- Cover the edges of surface that won't be painted by masking it with tape, paper or plastic.
- Clean up the wall surface to ensure it is free from dirt and dust.



### Primer

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)





# 2 Texture Coat

Brush on texture coat in criss cross patterns. Apply 1–2 layers. Ensure the whole surface area is covered.

Tool: Brush



# **3** Flattening

Flatten the entire surface in circular motion to enhance the pattern.

Tool: Plastic Scrapper



# 4 Topcoat

Evenly roll SR-Top 3 on entire surface. Allow to dry for 1 hour.

Tool: Roller



### IMPORTANT:

Color may vary on application technique & amount of material used.



Tools: Roller, Brush & Plactic Scrapper

# shmere

# **Packing Data**


1L	Primer
1 L	Texture Coat
1L	Topcoat (SR-Top 3)

### Coverage (per set)

WALL	<b>6 - 7</b> sqm
CEILING	<b>5 - 6</b> sqm







SCH-021 Tropical Garden





### SRT 201 - 233

A vibrant color layered in texture and dusted with a shimmering pearl effect crafts a bold and radiant feel onto the wall.

### **Appearance**

Low Sheen High Sheen

Smooth Texture Rough Texture

Matte Metallic

### **Features**



Low VOC & Odor



Green Choice, Water Based & Eco-friendly



Formaldehyde & Lead Free



Easy Application & DIY Friendly



Applicable on Ceiling



Easy Maintenance



Shimmering Finish

• Interior use only

10




SRT-214 Light Sapphire

SRT-231 Malted Mocha



SRT-203 Light Steel Blue

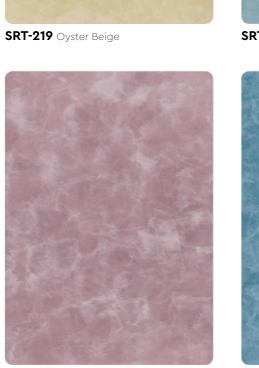







SRT-232 Pale Lavender





# Packing Data

1L	Primer
1L	Texture Coat
0.5 L	Topcoat (SR-Top 2)

### Coverage (per set)

WALL	<b>4.5</b> sqm
CEILING	<b>3.5</b> sqm

Strato® Taffeta

# Application Technique



Preparatio

- Cover the edges of surface that won't be painted by masking it with tape, paper or plastic.
- Clean up the wall surface to ensure it is free from dirt and dust.



### 1 Primer

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)

Tool: Roller



## 2 Sanding (Optional)

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



### **3** Texture Coat

Scrape texture coat in a random criss cross pattern. 2–3 layers. Every layer requires 30 minutes to dry.

Tool: Stainless Steel Scrapper



### 4 Sanding

Sand the entire surface in circular motion to enhance the pattern.

Tool: 600 Grit Sand Paper



# 5 Topcoat

Scrape on topcoat SR-Top 2 in a random criss cross overlapping patterns. Allow 1 hour to dry.

Taffeta has a **shimmering** pearl effect topcoat.

For a **matte** finishing, please request **SR-Top 1**.

Tool: Stainless Steel Scrapper

### IMPORTANT:

Color may vary on application technique & amount of material used.



Tools: Roller, Sand Paper (600 Grit) & Stainless Steel Scrapper.

SRT-232 Pale Lavender