



10 YEARS WARRANTY

STRATO®



EDITION
01

Matte
Engrainy

A large graphic featuring the number '10' in a bold, white, sans-serif font. The '0' is stylized with a white checkmark inside it. To the right of the '10', the words 'YEARS' and 'WARRANTY' are stacked vertically in a bold, white, sans-serif font, separated by a thin white horizontal line. The background is a dark, textured surface, possibly stone or concrete.

***Snag*
& **Win!****

iPad Pro

Check out our contest!
suzuka.com.my/promotion | T&C Apply

Free
**Product
Training**

For All Industry Professionals
suzuka.com.my/career-training



STRATO ISOLA-E1-2511



suzuka.com.my



suzuka.group | Hotline : +6012-258 7388

Hotline : +6012-258 7388



Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. **We suggest you examine actual product samples before ordering.**

STRATO ISOLA-E1-2511

STRATO ISOLA

A lightly textured coating with a soft, grainy feel that brings warmth and dimension to any surface. Its refined roughness adds visual interest while maintaining a clean, sophisticated look.



Appearance

Low Sheen	● ● ● ● ●	High Sheen
Smooth Texture	● ● ● ● ●	Rough Texture
Matte	● ● ● ● ●	Metallic

Features



Low VOC & Odor



Green Choice, Water Based & Eco-friendly



Anti-chalking & Efflorescence



For the Interior



Formaldehyde & Lead Free



Easy Application & DIY Friendly



Applicable on Ceiling



Matte Finishing



Easy to Touch Up



Easy Maintenance

Lighting Color Influence

Lighting color dramatically influences how a paint color appears by adding a layer of color to the surface, altering its perceived warmth, coolness, and vibrancy.

Cool Light

Neutral Light

Warm Light

STRATO® INTERIOR TEXTURED PAINT



Elevate your walls—and your peace of mind—with our newly launched **10-year warranty** on Strato textured paint

Designed to deliver long-lasting character and unmatched durability, this warranty reflects our confidence in the **premium quality** of our paint.


What it Covers?

Protection against **peeling, cracking, and fading**, ensuring your finish remains vibrant and intact for a **full decade**.

Why it Matters?

Textured finishes transform ordinary surfaces into statement features. With this warranty, you can enjoy that rich, tactile aesthetic worry-free — **no frequent touch-ups or repairs needed**.

A hassle-free, protected investment in your space — offering both **visual appeal** and **reliable performance**.

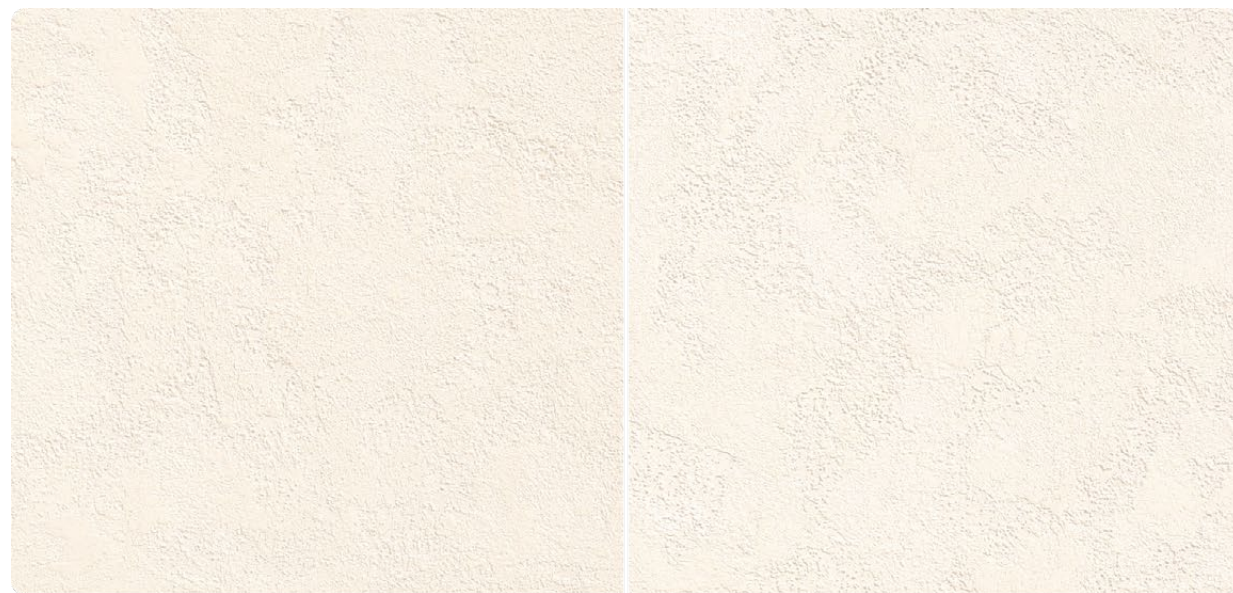


SCI-101-T Cornsilk White (Topcoat)

SCI-101-N Cornsilk White (No Topcoat)



SCI-102-T Pebble White (Topcoat)

SCI-102-N Pebble White (No Topcoat)

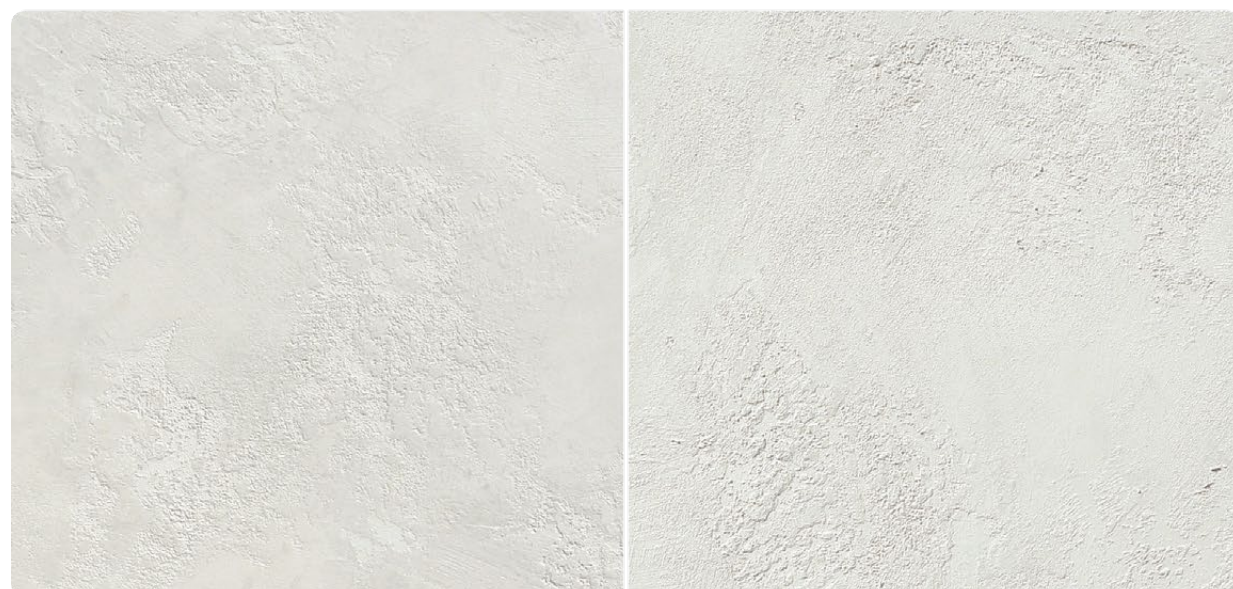

SCI-103-T Serene Grey (Topcoat)

SCI-103-N Serene Grey (No Topcoat)

Topcoat application may affect the finished coating.
The colour may appear slightly darker.



SCI-102 Pebble White



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tonne differences.

We highly recommend seeing actual samples before ordering.



SCI-111 Vanilla Froth

SCI-104 Nimbus Grey



SCI-109 Mauve Tint



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tonne differences.

We highly recommend seeing actual samples before ordering.



SCI-107 Koala Grey



SCI-104-T Nimbus Grey (Topcoat)



SCI-104-N Nimbus Grey (No Topcoat)



SCI-105-T Mushroom Grey (Topcoat)



SCI-105-N Mushroom Grey (No Topcoat)



SCI-106-T Concrete Grey (Topcoat)



SCI-106-N Concrete Grey (No Topcoat)




SCI-107-T Koala Grey (Topcoat)



SCI-107-N Koala Grey (No Topcoat)

Topcoat application may affect the finished coating.
The colour may appear slightly darker.

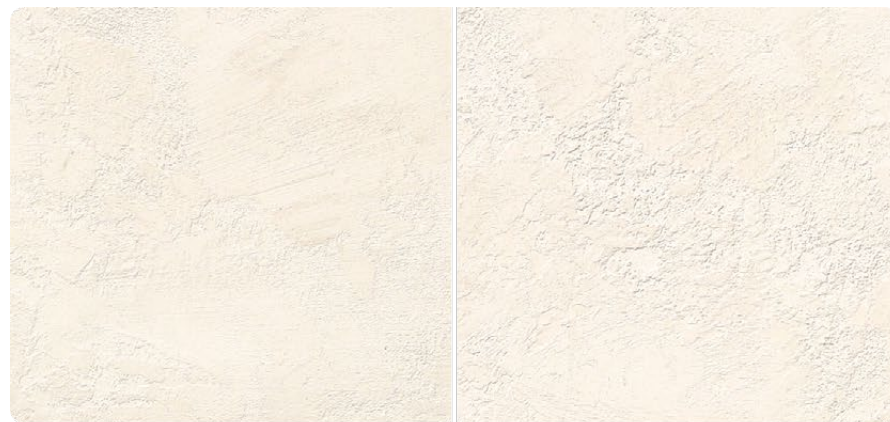


SCI-108-T Lily Ivory (Topcoat)

SCI-108-N Lily Ivory (No Topcoat)




SCI-109-T Mauve Tint (Topcoat)

SCI-109-N Mauve Tint (No Topcoat)

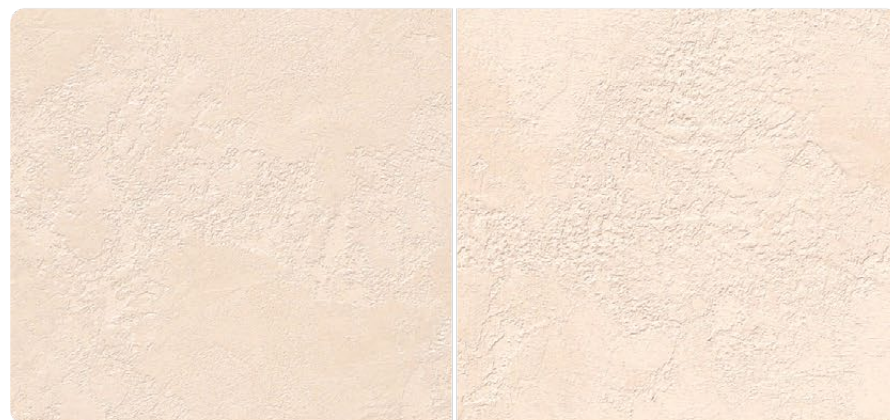

SCI-110-T Washed Petals (Topcoat)

SCI-110-N Washed Petals (No Topcoat)

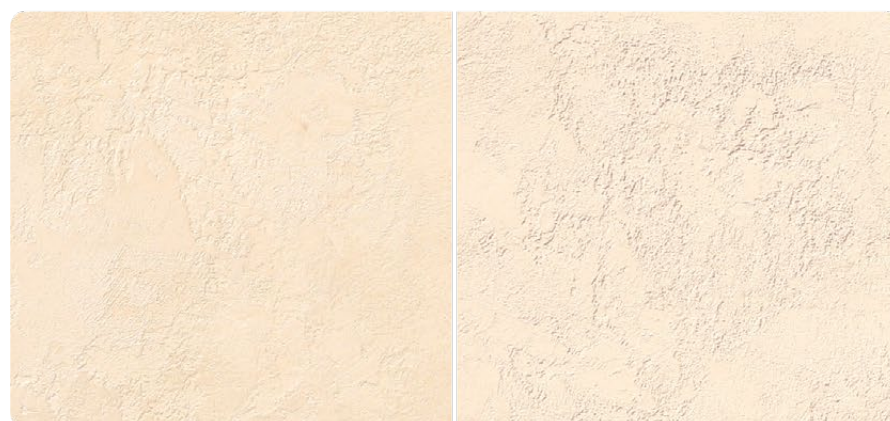

SCI-111-T Vanilla Froth (Topcoat)

SCI-111-N Vanilla Froth (No Topcoat)



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

We highly recommend seeing actual samples before ordering.

STE-108 Lily Ivory



SCI-102 Pebble White & **SCI-106** Concrete Grey




SVR-111 Vanilla Froth & **SVR-114** Desert Tan




SCI-112 Crochet Cream



SCI-114 Desert Tan

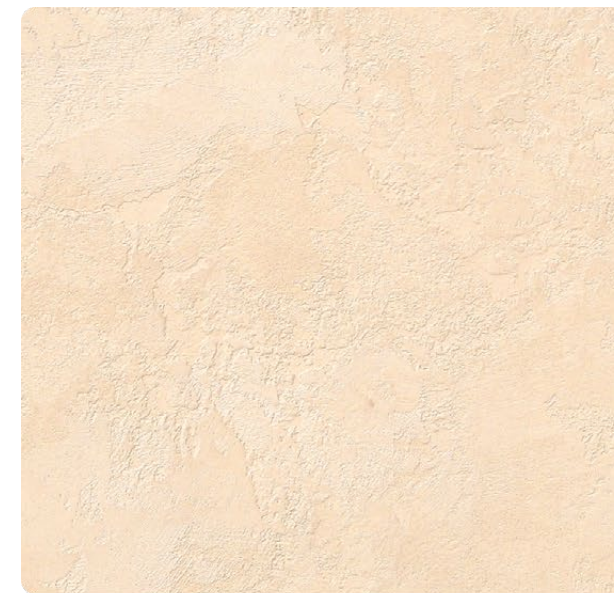


SCI-112-T Crochet Cream (Topcoat)

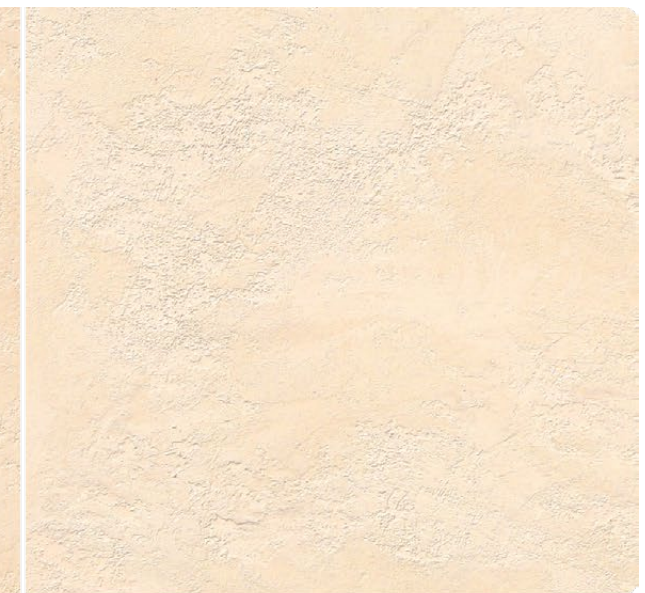

SCI-112-N Crochet Cream (No Topcoat)



SCI-113-T Oak Beige (Topcoat)

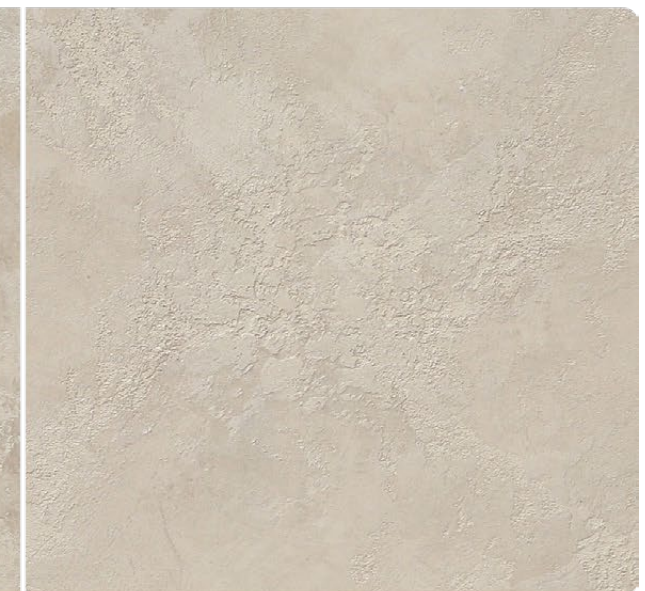


SCI-113-N Oak Beige (No Topcoat)




All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

We highly recommend seeing actual samples before ordering.

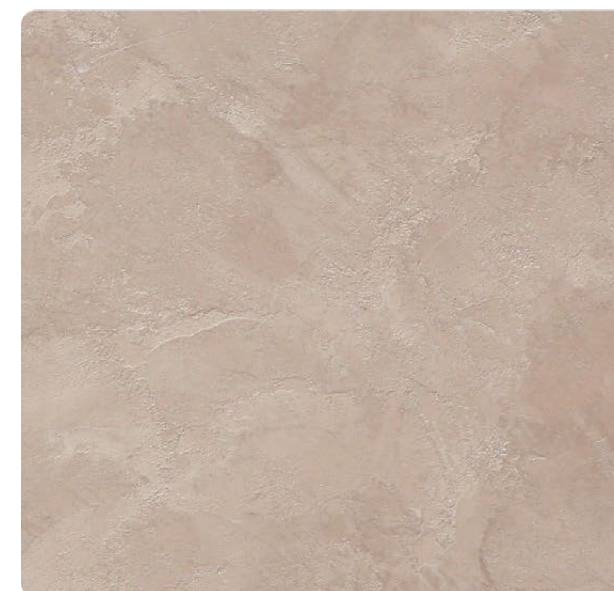


SCI-114-T Desert Tan (Topcoat)

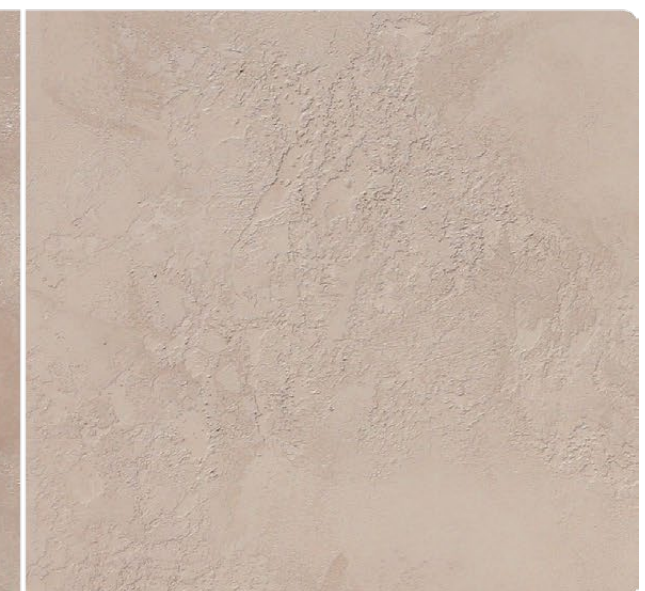

SCI-114-N Desert Tan (No Topcoat)

Topcoat application may affect the finished coating.
The colour may appear slightly darker.

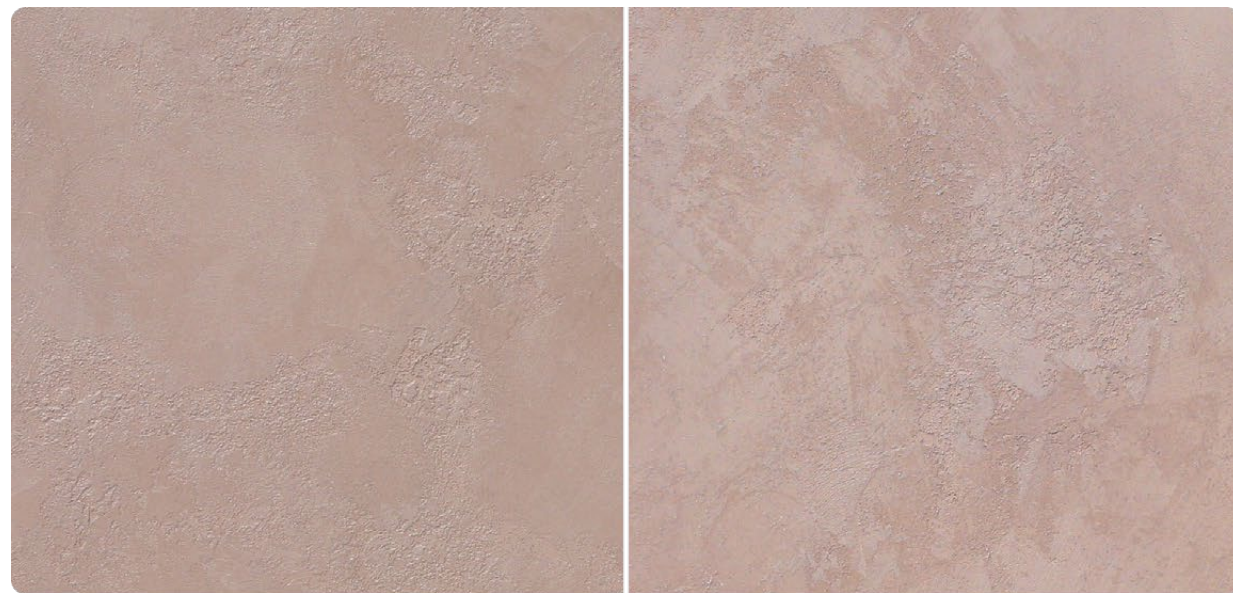


SCI-115-T Nutmeg Powder (Topcoat)

SCI-115-N Nutmeg Powder (No Topcoat)



SCI-116-T Robust Orange (Topcoat)

SCI-116-N Robust Orange (No Topcoat)

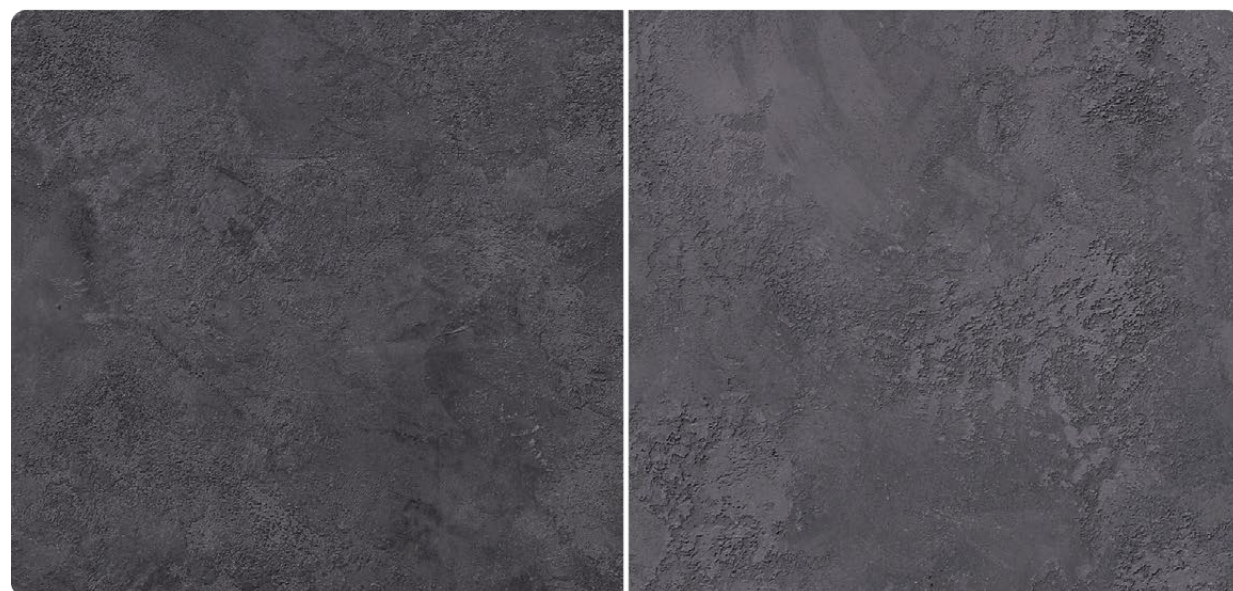

SCI-117-T Graphite Grey (Topcoat)

SCI-117-N Graphite Grey (No Topcoat)

Topcoat application may affect the finished coating.
The colour may appear slightly darker.



SCI-117 Graphite Grey



SCI-115 Nutmeg Powder



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

We highly recommend seeing actual samples before ordering.



SCI-116 Robust Orange



Application Instructions

Preparation:

- Surface shall be dry and free from dirt, oil, grease and foreign matters.
- Surface unevenness, cracks or any defects shall be repaired & treated.

IMPORTANT:

Color may vary on application technique & amount of material used.

Dilution Guide:

Primer : Max 3% of clean water
Texture : Do not dilute.



1 Primer

Roll 1 – 2 layers of Strato sand primer on the surface.
Allow it to dry for at least 4 hours.
(The primer can be diluted with maximum 3% of clean water)

Tool: Roller



2 Texture Coat

Using a plastic trowel, apply a thin layer (approx. 0.5 - 1.0 mm thick) of texture coat onto the primed surface.

(Do not dilute the texture coat with water or any solvents)

- (1) Randomly dab an adequate amount of texture paint onto the surface.
(2) Scrape the surface randomly to create a subtle unevenness of texture effect.
(3) Let the surface to completely dry for 4 – 6 hours.

Repeat the steps for a **second layer** to enhance the texture effects.

Tool: Plastic Trowel



3 Topcoat Optional

Apply a layer of topcoat (SR-Top 6) onto the surface and let dry.

Topcoat application may affect the finished coating.
The colour may appear slightly darker

Tool: Roller

Tools: Roller, Plastic Trowel.



PACKING



Packing	Material	Coverage (±5%)
3.8L set	1L Strato Sand Primer	7 - 9 sqm
	2L Texture Coat	6 - 8 sqm
	0.8L Topcoat (SR-Top 6)	8 - 10 sqm
15.2L set	4L Strato Sand Primer	28 - 36 sqm
	8L Texture Coat	24 - 32 sqm
	3.2L Topcoat (SR-Top 6)	32 - 40 sqm
WITHOUT TOPCOAT		
3L set	1L Strato Sand Primer	7 - 9 sqm
	2L Texture Coat	6 - 8 sqm
12L set	4L Strato Sand Primer	28 - 36 sqm
	8L Texture Coat	24 - 32 sqm

*Strato® Isola packing set is available for option with topcoat or without topcoat

SCI-104 Nimbus Grey



SUZUKA®

WALL SEALER PRO

“ Make your wall finishes last longer! ”

Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off. It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Coverage	Drying Time (hour)		
6.5 - 8.5 m ² /l/coat	Surface Dry : 1	Hard Dry : 5	Recoating : 5
Substrate Temperature: 23°C - 26°C			

- Suitable for:

 - Masonry wall
 - Brickwork
 - Plaster
 - Skimmed Coat
 - Asbestos free substrate
- Features:

 - Excellent alkaline resistance to prevent efflorescence.
 - Good for new walls and repainting.
 - Prevents skim coat from chalking & peeling off.
 - Extremely good penetration.
 - Excellent adhesion.
 - Exterior and interior use.
 - Applicable with brush, roller or spray gun.

Airless Spray	Nozzle 1.8 - 2.0 mm	Spray Angle Degree 65° - 80°	Pressure 210 psi/150kg/cm ²
---------------	---------------------	------------------------------	--