

SUZUKA® STONEWEAVE

Decorative **architectural stone finish** consisting of **graded natural stone aggregates** embedded in a **high-strength premium plaster matrix**. It is designed to provide a textured stone appearance with durability suitable for both interior and exterior surfaces.


Features

-  Formaldehyde & Lead Free
-  Low VOC & Odor
-  Environmentally Friendly
-  Durable & Weather-resistant
-  Excellent Adhesion
-  High Strength & Endurance
-  Suitable for Exterior & Interior
-  Low & Easy Maintenance



SUZUKA®
STONEWEAVE
ARCHITECTURAL STONE FINISH

EDITION
01

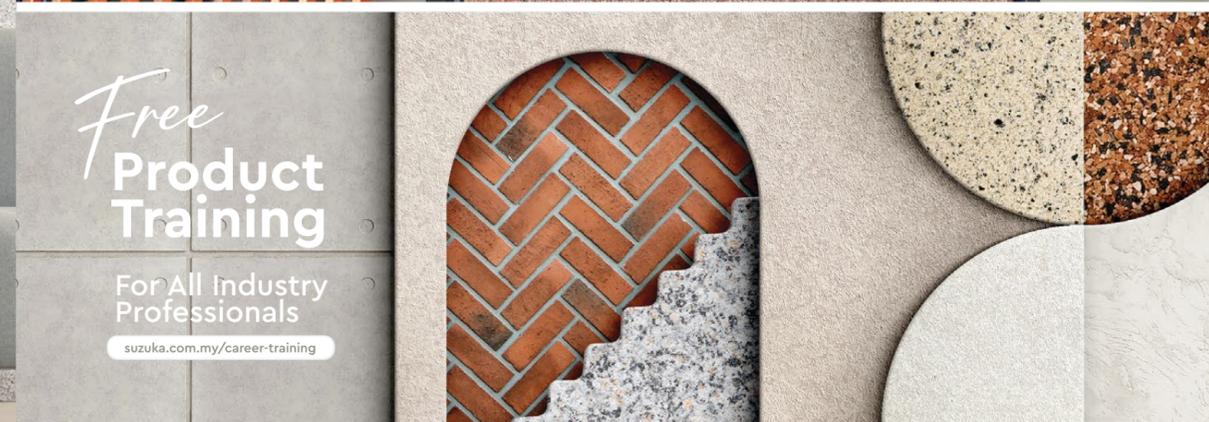

Free
**Product
Training**

For All Industry
Professionals

suzuka.com.my/career-training



suzuka.com.my

[f](https://www.facebook.com/suzuka.group) [@](https://www.instagram.com/suzuka.group) [y](https://www.youtube.com/suzuka.group) [in](https://www.linkedin.com/suzuka.group) [t](https://www.tiktok.com/suzuka.group) [wa](https://www.whatsapp.com/suzuka.group) [tg](https://www.telegram.com/suzuka.group) [v](https://www.viber.com/suzuka.group) [z](https://www.zoosk.com/suzuka.group) [sk](https://www.skype.com/suzuka.group) [s](https://www.signal.com/suzuka.group) [wa](https://www.whatsapp.com/suzuka.group) [tg](https://www.telegram.com/suzuka.group) [v](https://www.viber.com/suzuka.group) [z](https://www.zoosk.com/suzuka.group) [sk](https://www.skype.com/suzuka.group) [s](https://www.signal.com/suzuka.group)

TYPE A



SW-A-101



SW-A-102



SW-A-103



SW-A-104



SW-A-105

Coating Thickness & Aggregate Size:

- 3.0 kg/m² of 2.0 mm Stoneweave Plaster
- 6.0 kg/m² of 3.0 mm Stoneweave Aggregate

Packing:

- 25 kg / pail Stoneweave Plaster
- 32 kg / pail Stoneweave Aggregate

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

TYPE B



SW-B-201



SW-B-202



SW-B-203



SW-B-204



SW-B-205

Coating Thickness & Aggregate Size:

- 3.8 kg/m² of 3.0 mm Stoneweave Plaster
- 8.0 kg/m² of 5.0 mm Stoneweave Aggregate

Packing:

- 25 kg / pail Stoneweave Plaster
- 32 kg / pail Stoneweave Aggregate

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.



SUZUKA® STONEWEAVE Application Process

Process	Material (Dilution)	Number of Coats	Time Interval Between Process	Consumption (±15%)	Tools
1 Primer	Suzuka® EM Primer (Dilution: Max 5% with water)	1	4 hrs	7 - 9 m ² /l	Spray Gun, Roller or Brush
2 Texture Coat	Stoneweave Plaster	1	24 hrs	3.0 - 5.0 kg/m ²	Trowel
3 Aggregate	Stoneweave Aggregates	1	24 hrs	6.0 - 8.0 kg/m ²	Spray Gun, Roller
4 Top Coat	Suzuka® Stonecare High Gloss (Dilution: Max 5% with thinner)	1 - 2	4 - 6 hrs	7 - 9 m ² /l	Roller

* For more details, please request to see the Technical Data Sheet (TDS).