

10 YEARS WARRANTY
STRATO®



STRATO®
CASHMERE & TAFFETA

EDITION
1.2

Chimmery
INTERIOR TEXTURED PAINTS

- Complies to the
- American California Proposition 65 Standard.
 - LEED, U.S. Green Building Council Standard.

10 YEARS WARRANTY



Snap & Win!
iPad Pro

Check out our contest!
suzuka.com.my/promotion | T&C Apply

Free
Product
Training

For All Industry
Professionals
suzuka.com.my/career-training

WALL FINISH
PROFESSIONALS.

SINCE
1977



suzuka.com.my

f @ suzuka.group +6012-258 7388



All images included in this catalog are for visual reference only.
Actual product may have a slight color difference due to variations in printing processes or digital viewing settings. We suggest you examine actual product samples before ordering.



ISO 9001
ISO 14001
ISO 45001
CERTIFIED



CASHMERE & TAFFETA-E1.2-2607


STRATO® CASHMERE



Strato® Cashmere embodies the pinnacle of elegance in textured coating. Achieved through smooth layering and delicate craftsmanship, the finished product gives a refined and royal appearance with a lingering hint of sophistication.




Appearance

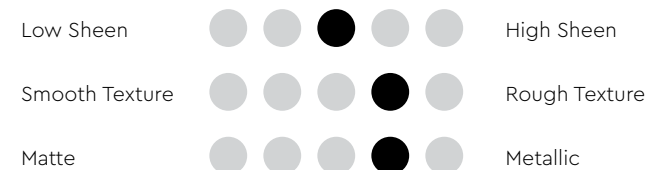

Complies to the
 • **American California Proposition 65**
 • **LEED, U.S. Green Building Council Standards**

Features

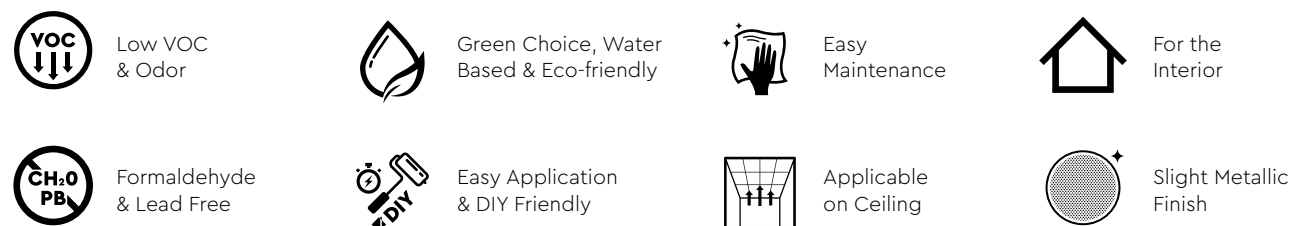

Cool Light

Neutral Light

Warm Light

Lighting Color Influence

Lighting color dramatically influences how a paint color appears by adding a layer of color to the surface, altering its perceived warmth, coolness, and vibrancy.

STRATO® INTERIOR TEXTURED PAINT



Elevate your walls—and your peace of mind—with our newly launched **10-year warranty** on Strato textured paint

Designed to deliver long-lasting character and unmatched durability, this warranty reflects our confidence in the **premium quality** of our paint.

What it Covers?

Protection against **peeling, cracking, and fading**, ensuring your finish remains vibrant and intact for a **full decade**.

Why it Matters?

Textured finishes transform ordinary surfaces into statement features. With this warranty, you can enjoy that rich, tactile aesthetic worry-free — **no frequent touch-ups or repairs needed**.

A hassle-free, protected investment in your space — offering both **visual appeal** and **reliable performance**.



SCH-001 Pearl White




SCH-002 Silver Mist



SCH-003 Silver Slate



SCH-004 Platinum Metal

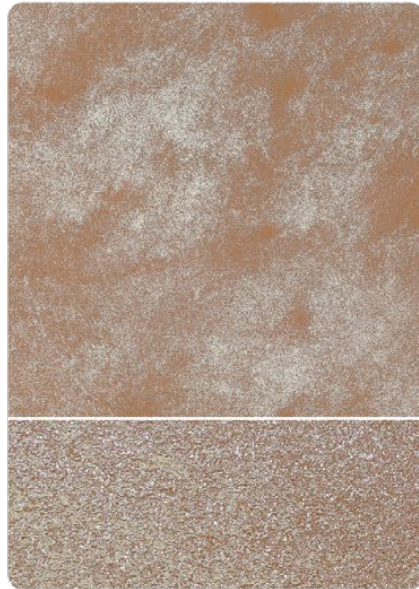

SCH-005 Bronze Age



SCH-006 Sand Castle Beige



SCH-007 Autumn Beige



SCH-008 Eggshell Beige



SCH-009 Desert Gold



SCH-003 Silver Slate




SCH-016 Stardust Silver



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

We highly recommend seeing actual samples before ordering.

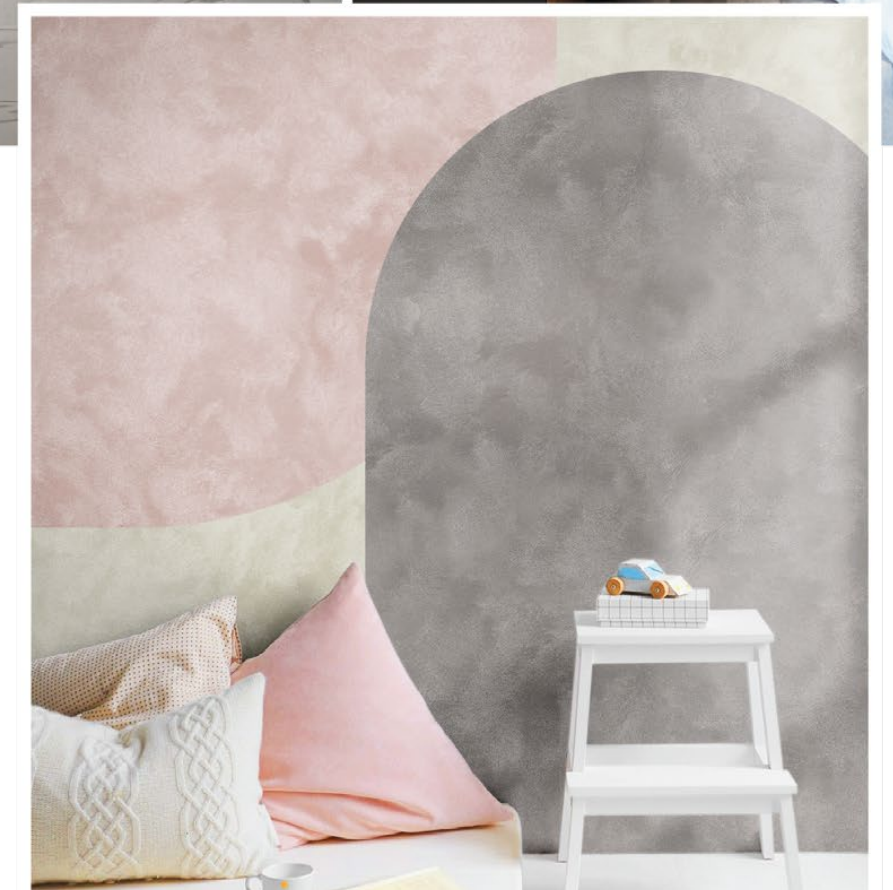



SCH-014 Coral Blush



SCH-015 Powder Blue




All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.


We highly recommend seeing actual samples before ordering.



SCH-010 Honey Yellow

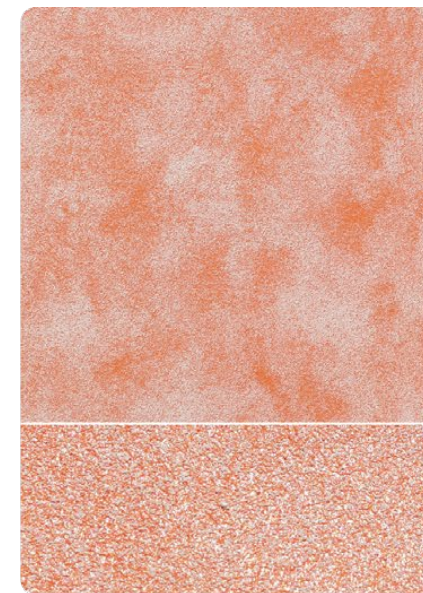

SCH-011 Peach Blossom

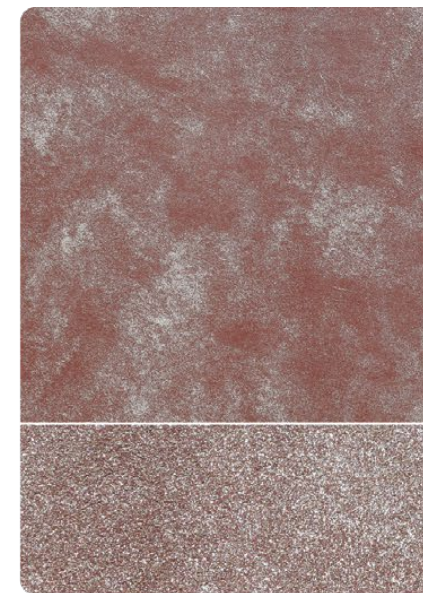

SCH-012 Plum Sunset



SCH-013 Baby Doll Pink



SCH-014 Coral Blush



SCH-015 Powder Blue



SCH-016 Stardust Silver



SCH-017 Lace blue



SCH-018 Ash Grey

All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences. **We highly recommend seeing actual samples before ordering.**






SCH-006 Sand Castle Beige



SCH-019 Peacock Blue



SCH-019 Peacock Blue

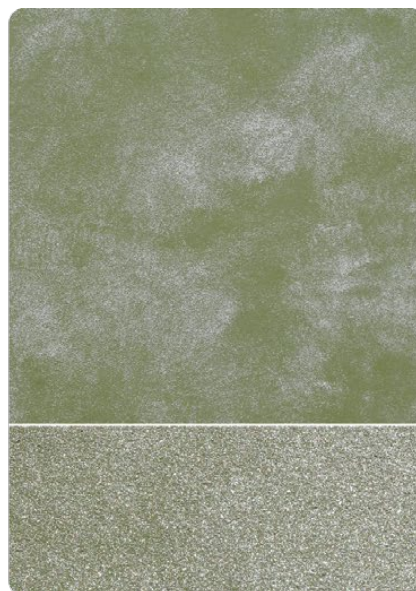

SCH-020 Olive Tree



SCH-021 Tropical Garden



Strato® Cashmere

Application Instructions

Preparation:

- Surface shall be dry and free from dirt, oil, grease and foreign matters.
- Surface unevenness, cracks or any defects shall be repaired & treated.

IMPORTANT:

Color may vary on application technique & amount of material used.

Dilution Guide:

Primer : Max 3% of clean water
Texture : Do not dilute.



1 Primer

Roll 2 layers of primer on the entire surface.
Allow 30 minutes to dry between the layers.
(The primer can be diluted with maximum 3% of clean water)

Tool: Roller



2 Texture Coat

(Do not dilute the texture coat with water or any solvents)

Brush on texture coat in criss cross patterns. Apply 1-2 layers.
Ensure the whole surface area is covered.

Tool: Brush



3 Flattening

Flatten the entire surface in circular motion to enhance the pattern.

Tool: Plastic Scrapper



4 Topcoat

Evenly roll SR-Top 3 on entire surface.
Allow to dry for 1 hour.

Tool: Roller

Recommended Tools:
Roller, Brush, Plastic Scrapper.



PACKING



Packing	Material	Coverage / set (±5%)
3L set	1L Primer	6 - 7 sqm (Wall) 5 - 6 sqm (Ceiling)
	1L Texture Coat	
	1L Topcoat (SR-Top 3)	




STRATO[®] TAFETTA



A vibrant color layered in texture and dusted with a shimmering pearl effect crafts a bold and radiant feel onto the wall.



Appearance

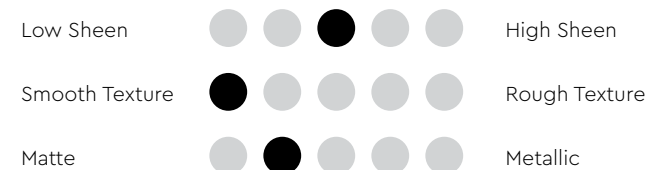

Complies to the
 • **American California Proposition 65**
 • **LEED, U.S. Green Building Council Standards**

Features



Low VOC
& Odor



Green Choice, Water
Based & Eco-friendly



Easy
Maintenance



For the
Interior



Formaldehyde
& Lead Free



Easy Application
& DIY Friendly



Applicable
on Ceiling



Shimmery
Finish

Lighting Color Influence

Lighting color dramatically influences how a paint color appears by adding a layer of color to the surface, altering its perceived warmth, coolness, and vibrancy.

Cool Light

Neutral Light

Warm Light

SRT-209 Light Sephia





SRT-201 Pewter Grey




SRT-203 Light Steel Blue



SRT-209 Light Sephia




SRT-214 Light Sapphire

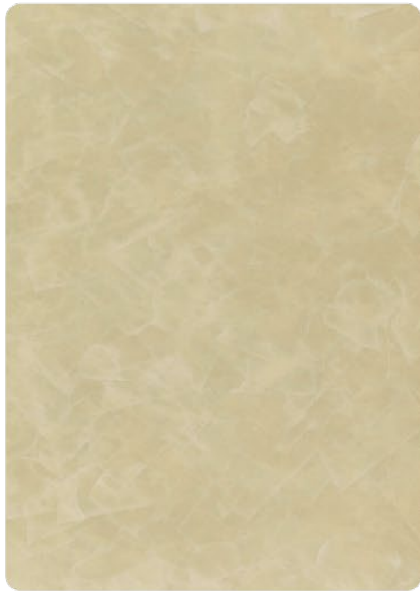

SRT-219 Oyster Beige



SRT-225 Blue Waves

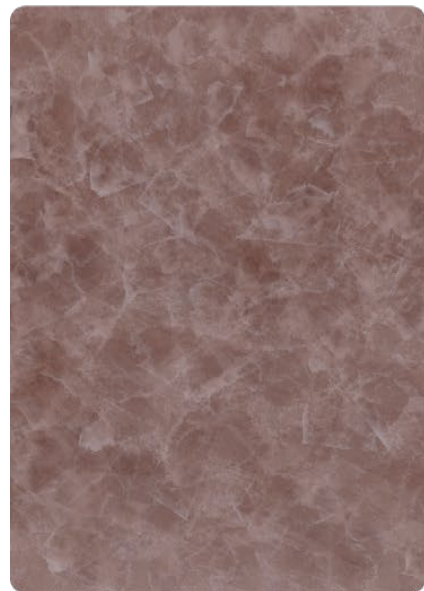

SRT-231 Malted Mocha



SRT-232 Pale Lavender



SRT-233 Ocean Surface

SRT-201 Pewter Grey



SRT-214 Light Sapphire



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

We highly recommend seeing actual samples before ordering.



SRT-203 Light Steel Blue





Strato® Tafetta

Application Instructions

Preparation:

- Surface shall be dry and free from dirt, oil, grease and foreign matters.
- Surface unevenness, cracks or any defects shall be repaired & treated.

IMPORTANT:

Color may vary on application technique & amount of material used.

Dilution Guide:

Primer : Max 3% of clean water
Texture : Do not dilute.



1 Primer

Roll 2 layers of primer on the entire surface.
Allow 30 minutes to dry between the layers.
(The primer can be diluted with maximum 3% of clean water)

Tool: Roller



2 Sanding

Sand surface with sandpaper (600 grit) to ensure a smooth surface.

Tool: 600 Grit Sand Paper



3 Texture Coat

(Do not dilute the texture coat with water or any solvents)

Scrape texture coat in a random criss cross pattern.
Apply 2-3 layers. Every layer requires 30 minutes to dry.

Tool: Stainless Steel Scraper



4 Sanding

Sand surface with sandpaper (600 grit) to enhance the pattern.

Tool: 600 Grit Sand Paper




5 Topcoat

Scrape on topcoat SR-Top 2 in a random criss cross overlapping patterns. Allow 1 hour to dry.



Taffeta has a **shimmering** pearl effect topcoat.
For a **matte** finishing, please request **SR-Top 1**.

Tool: Stainless Steel Scraper

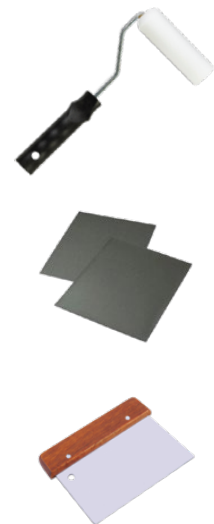

Recommended Tools:
Roller,
Sand Paper (600 Grit),
Stainless Steel Scraper.



PACKING

Packing	Material	Coverage / set (±5%)
2.5L set	1L Primer	4.5 sqm (Wall)
	1L Texture Coat	3.5 sqm (Ceiling)
	0.5L Topcoat (SR-Top 2)	

SRT-219 Oyster Beige

SRT-232 Pale Lavender



SUZUKA®
WALL SEALER PRO

“ Make your wall finishes last longer! ”



Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off. It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Packing Size:

1L 5L 20L

Coverage	Drying Time (hour)		
6.5 - 8.5 m ² /l/coat	Surface Dry : 1	Hard Dry : 5	Recoating : 5
	Substrate Temperature: 23°C - 26°C		

Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Features:

- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

Airless Spray	Nozzle 1.8 - 2.0 mm	Spray Angle Degree 65° - 80°	Pressure 210 psi/150kg/cm ²
---------------	---------------------	------------------------------	--