

Snap & Win!

iPad Pro

Check out our contest!

suzuka.com.my/promotion | T&C Apply

Free Product Training

For All Industry Professionals

suzuka.com.my/career-training



suzuka.com.my

suzuka.group +6012-258 7388

All images included in this catalog are for visual reference only.

Actual product may have a slight color difference due to variations in printing processes or digital viewing settings. **We suggest you examine actual product samples before ordering.**

ISO 9001 ISO 14001 ISO 45001 CERTIFIED

JAS-ANZ

KASTONE BRICK-E11.1-2610

SUZUKA

KASTONE®

BRICK VENEER COLLECTIONS

EDITION 11.1

GreenLabel SINGAPORE

WALL FINISH PROFESSIONALS.

SINCE 1977

KASTONE®

BRICK VENEER COLLECTIONS

KASTONE® products range from classic brick styles to timeless stone designs. Our brick and stone veneer collections showcase a wide variety of colours, shapes, and textures, catering to any interior or exterior space.

KASTONE® veneers are authentic in appearance and feel, as each piece is uniquely crafted to mirror natural stones and bricks. Comprised only of premium raw materials, our veneers' lightweight and durable nature streamlines the installation process while minimizing costs and maintenance work.


Corner Brick



Flat Brick





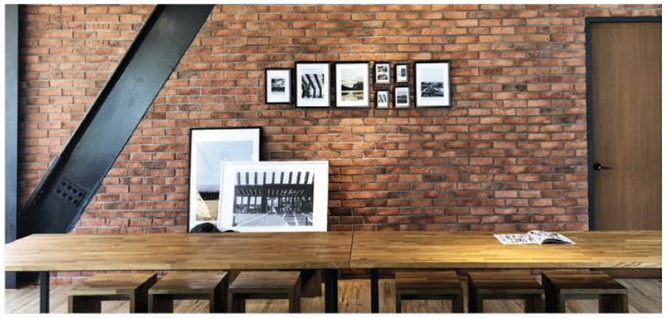





WALL FINISH PROFESSIONALS





SUZUKA® Malaysia belongs to the **SUZUKA® Group**, which holds manufacturing companies in Taiwan, Malaysia, and Thailand. As one of South East Asia's leading manufacturers in decorative building materials, SUZUKA® Malaysia's expertise in wall finishes dates back to its origins in the town of Suzuka, Japan, after World War II. Specializing in a wide range of stone veneers, waterproofing materials, and textured coatings, we offer durable products that are suitable for decorating and protecting both the interiors and exteriors of your homes and commercial buildings.

Not only do our products cater to buildings of various aesthetics and designs, but they also exceed international quality and safety standards. Armed with protection against UV damage, water seepage, dust, dirt and stains, we lower potential maintenance costs in the future. In addition to being an ISO 9001 certified company, we also carry a selection of SIRIM QAS certified products and a range of environmentally-friendly products certified by Singapore Green Label and SIRIM Eco Label.

Within the past decade, we've become an international supplier to number of regions, including Australia, Saudi Arabia, Thailand, Cambodia, Qatar, the United Arab Emirates, Bahrain, Indonesia, Singapore, and West Africa.

To experience why SUZUKA® products are trusted around the world, choose from our extensive range of coatings and artificial stone veneers.




BK-3303




BK-3402

BK-33




Coverage (Per Box) : **6.02 ~ 6.46 sqf**
Weight (Per Box) : **17 kg**
Pieces (Per Box) : **10 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*

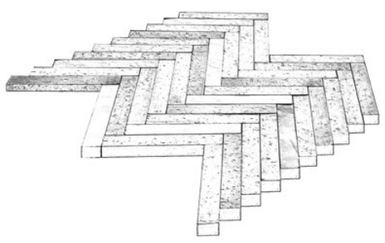

Recommended Installation Layout

- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

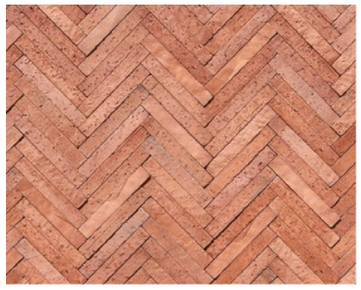

BK-3301



BK-3302



BK-3303



BK-3304



BK-3401



BK-3402



BK-3403

BK-34




Coverage (Per Box) : **7.64 ~ 8.50 sqf**
Weight (Per Box) : **13 kg**
Pieces (Per Box) : **17 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*

Recommended Installation Layout

- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

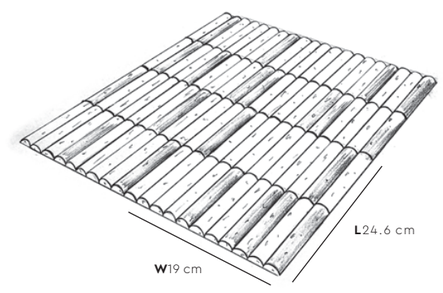

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.


All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.



BK-3501



BK-3602

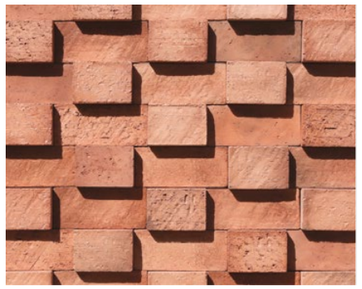



BK-3501



BK-3502

BK-35

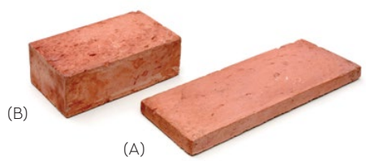

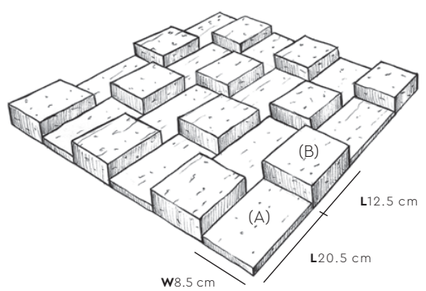

Coverage (Per Box) : **4.35 ~ 4.83 sqf**
Weight (Per Box) : **25 kg**
Pieces (Per Box) : **(A) 16 , (B) 16 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*

Recommended Installation Layout

- Arrange the stones in alternate sizes.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).




BK-3601



BK-3602

BK-36



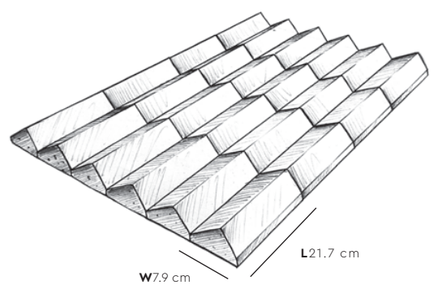

Coverage (Per Box) : **4.15 ~ 4.60 sqf**
Weight (Per Box) : **26 kg**
Pieces (Per Box) : **25 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*

Recommended Installation Layout

- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.




KASTONE® AiR

Lightweight, Flexible, Authentic Texture and Easy Installation.


One of the lightest artificial stone veneers. Its semi-flexibility allows application onto curved surfaces (35 cm in diameter & over) without cracking.

Its flexibility also allows it to be cut & trimmed with scissors making it ideal for DIY & surfaces with unique shapes & designs.

- **Semi-flexible**
- **5-6mm in thickness**
- **Recommended for DIY**
- **Cut or trim with scissors**
- **Recommended for curved surfaces & columns.**
  (35cm in diameter or over)

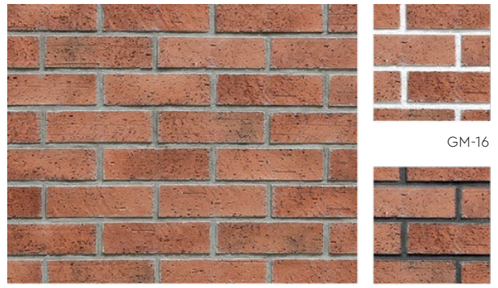

AR-3001 Grouting GM-12 GM-01 GM-16

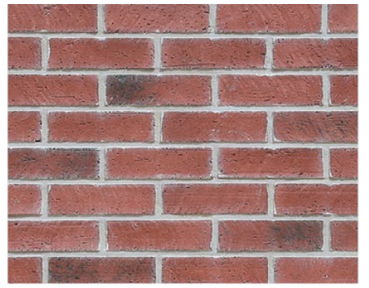






AR-3002 Grouting GM-11 GM-16 GM-01



AR-3003 Grouting GM-16 GM-12 GM-11







AR-3004 Grouting GM-12 GM-16 GM-01

AR-30




Coverage (Per Box) : **10.3 ~ 10.5 sqf**
Weight (Per Box) : **6.39 kg**
Pieces (Per Box) : **60 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*

Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

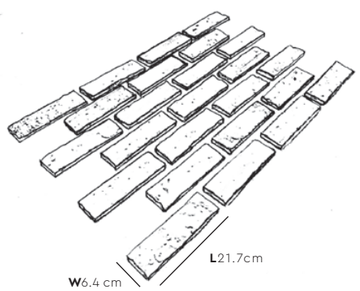


All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

KASTONE® | AR-30



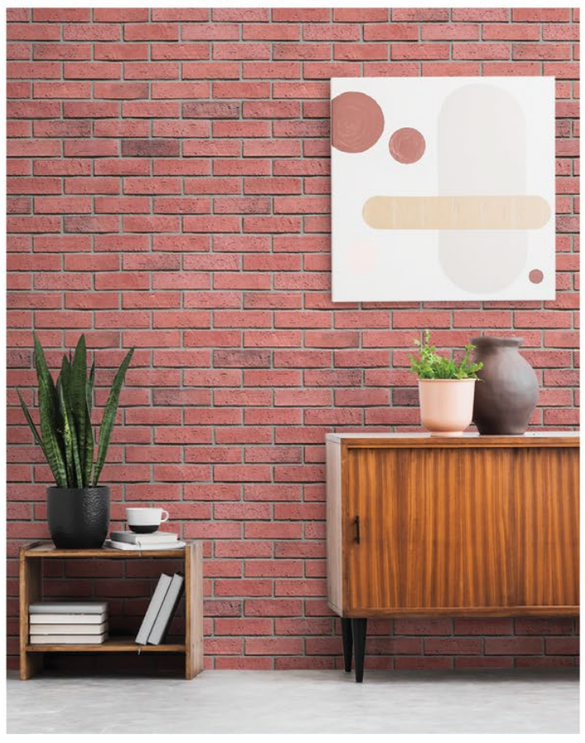




KASTONE® Lite

Lightweight, Authentic Texture and Easy Installation.

At a fraction in thickness & weight, it is easy & fast to install, it also gives a more polished & sleek finish for those who are looking for less texture.

- **4-7 mm in Thickness**
- **Recommended for Partitions**
- **Fast & Easy Installation.**

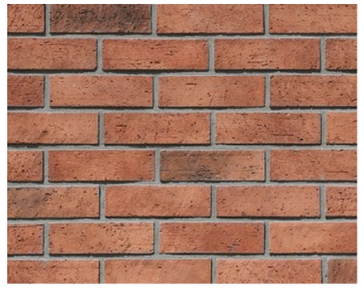



GM-11



BL-6101 Grouting GM-12 GM-16





GM-11



BL-6104 Grouting GM-01 GM-16






GM-01



BL-6106 Grouting GM-16 GM-11

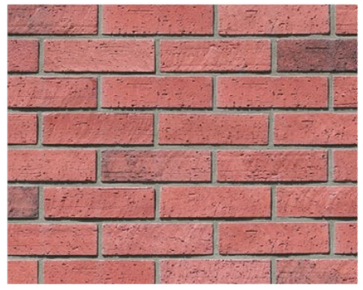



GM-16



BL-6108 Grouting GM-12 GM-01

BL-61



Coverage (Per Box) : **8.0 ~ 8.2 sqf**
Weight (Per Box) : **7.20 kg**
Pieces (Per Box) : **46 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*

Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).




All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.





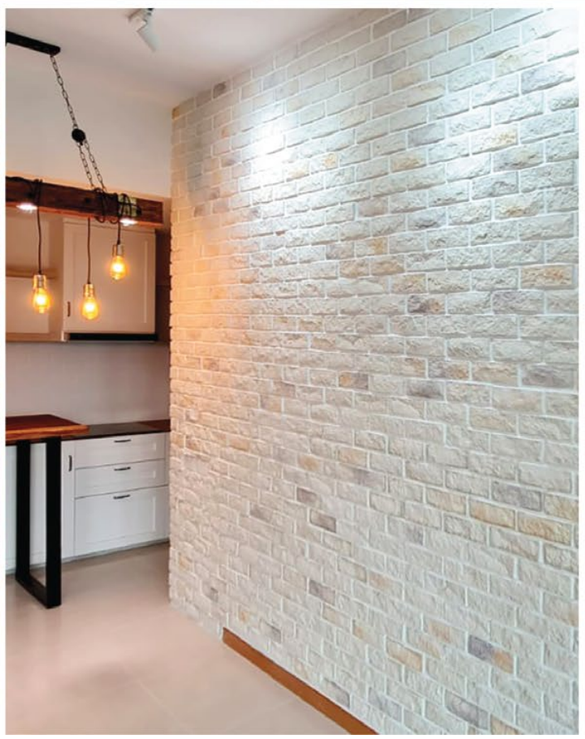

BK-71





Coverage (Per Box) : **8.4 ~ 8.6 sqf**
Weight (Per Box) : **18.87 kg**
Pieces (Per Box) : **55 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*

Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

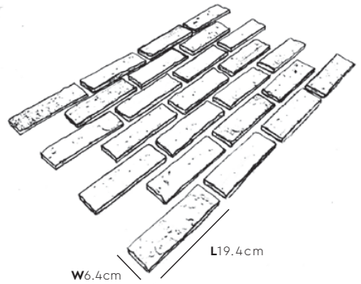

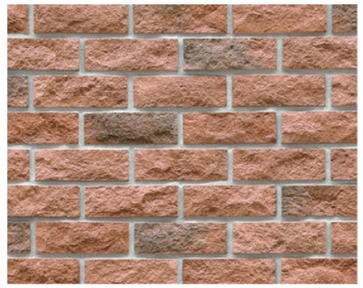



GM-16



BK-7101 Grouting GM-11 GM-01





GM-01



BK-7102 Grouting GM-16 GM-12





GM-16



BK-7104 Grouting GM-12 GM-01





GM-16



BK-7105 Grouting GM-11 GM-01






GM-01



BK-7106 Grouting GM-16 GM-11

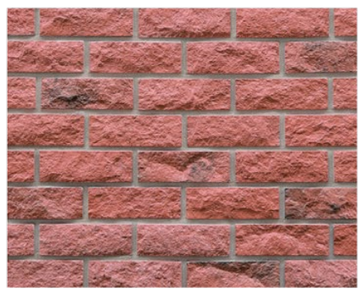



GM-16



BK-7108 Grouting GM-12 GM-01

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

BQ-00

Coverage (Per Box) : **8.3 ~ 8.6 sqf**
Weight (Per Box) : **19.50 kg**
Pieces (Per Box) : **8 pcs**

* *Please allow a +/- 5% tolerance for stone size & colour*







All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.







BQ-001 Grouting GM-16 GM-11 GM-01







BQ-002 Grouting GM-11 GM-01 GM-16








BQ-003 Grouting GM-12 GM-16 GM-01







BQ-004 Grouting GM-11 GM-16 GM-01

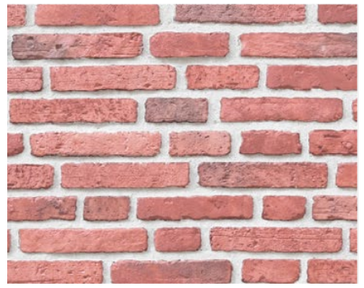





BQ-005 Grouting GM-16 GM-11 GM-01








BQ-006 Grouting GM-01 GM-16 GM-11




Recommended Installation Layout

- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

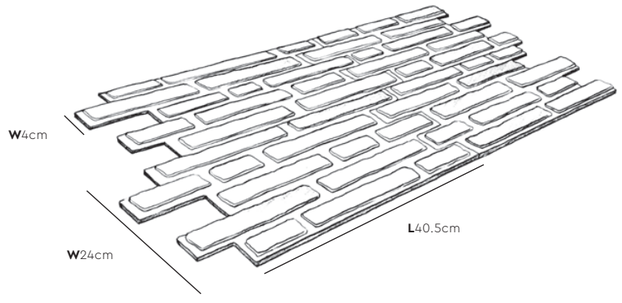

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.



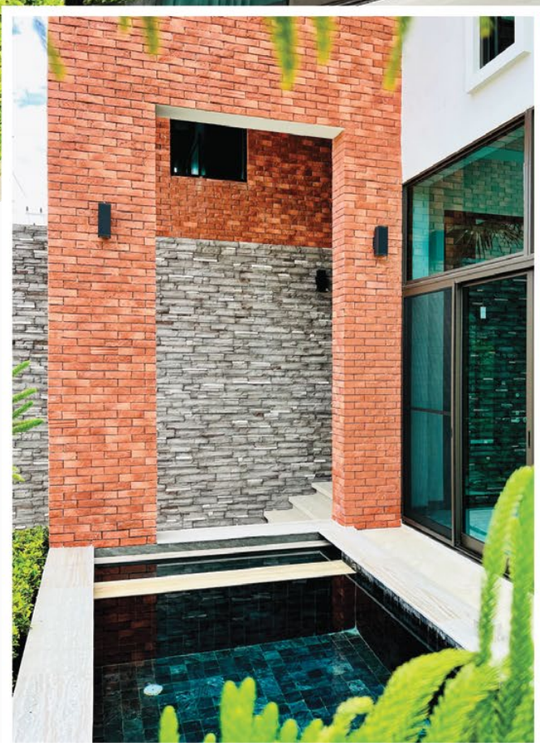



BK-31

Flat Brick:
Coverage (Per Box) : **7.7 ~ 7.9 sqf**
Weight (Per Box) : **14.47 kg**
Pieces (Per Box) : **48 pcs**


Corner Brick:
Coverage (Per Box) : **5.0 ~ 5.2 f**
Weight (Per Box) : **10.68 kg**
Pieces (Per Box) : **21 pcs**


** Please allow a +/- 5% tolerance for stone size & colour*



Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

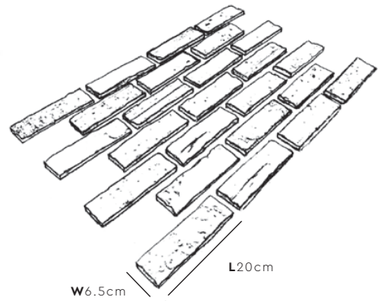

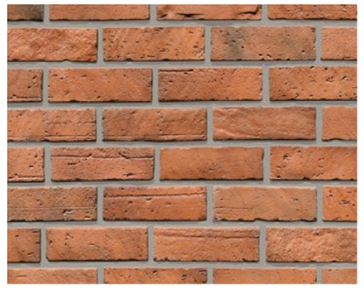



BK-3101 Grouting GM-12 GM-16 GM-01





BK-3102 Grouting GM-16 GM-01 GM-12





BK-3104 Grouting GM-11 GM-16 GM-01





BK-3105 Grouting GM-11 GM-16 GM-01





BK-3106 Grouting GM-16 GM-01 GM-11







BK-3107 Grouting GM-12 GM-16 GM-01

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

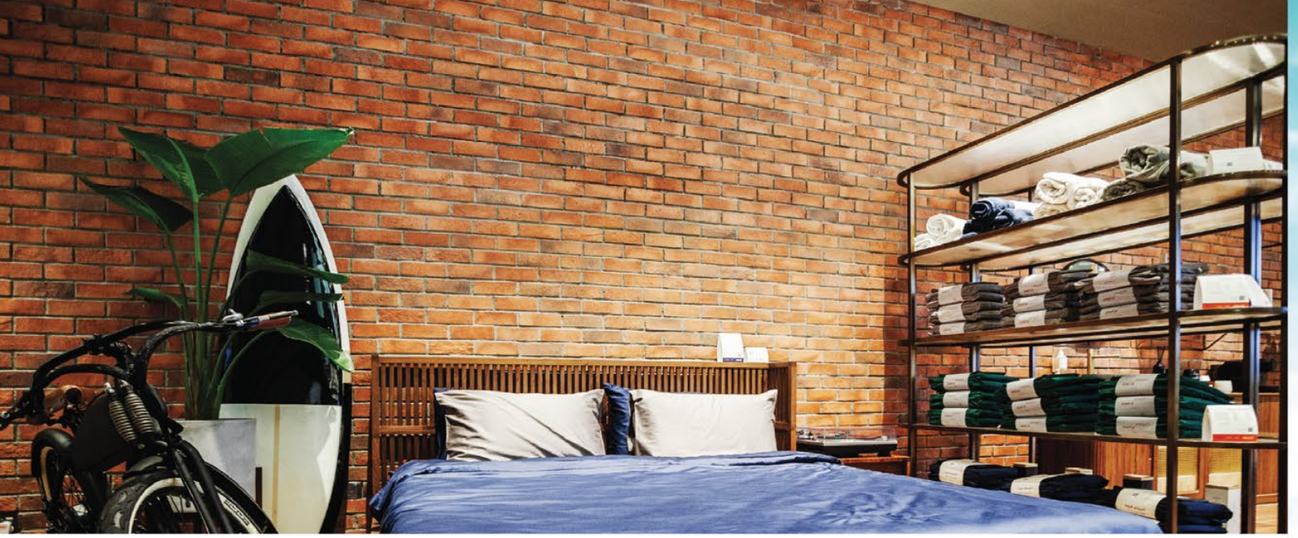

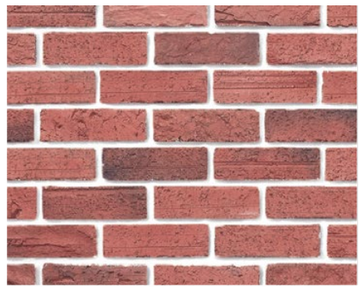



GM-12



GM-01

BK-3108 Grouting GM-16






GM-12



GM-16

BK-3109 Grouting GM-01





GM-16



GM-01

BK-3110 Grouting GM-12





GM-16



GM-01

BK-3111 Grouting GM-11

NEW COLOUR





GM-12



GM-11

BK-3121 Grouting GM-16

NEW COLOUR





GM-12



GM-01

BK-3122 Grouting GM-16










All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.



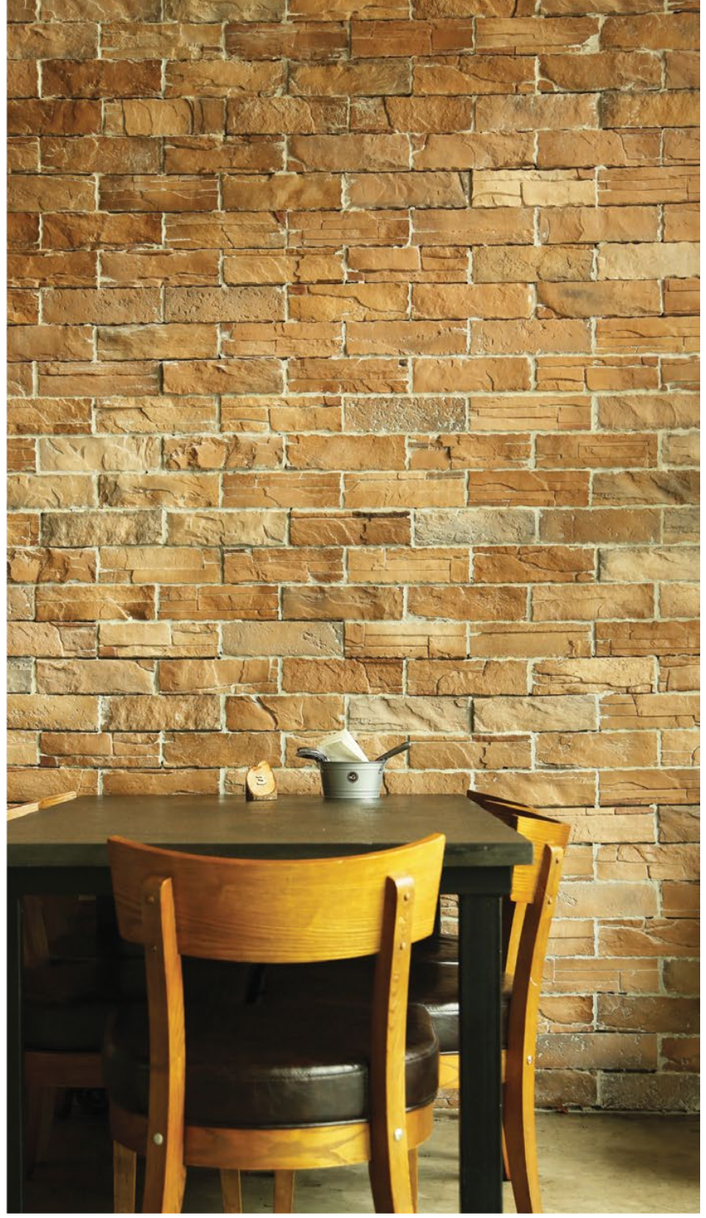







BK-4102 Grouting GM-16 GM-01





GM-16



BK-4104 Grouting GM-01 GM-11





GM-16



BK-4105 Grouting GM-12 GM-01





GM-16



BK-4101 Grouting GM-11 GM-01





GM-12



BK-4106 Grouting GM-16 GM-01

BK-41

Flat Brick:
Coverage (Per Box) : **8.6 ~ 8.9 sqf**
Weight (Per Box) : **21.57 kg**
Pieces (Per Box) : **30 pcs**


Corner Brick:
Coverage (Per Box) : **4.8 ~ 5.1 f**
Weight (Per Box) : **14.47 kg**
Pieces (Per Box) : **16 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*



Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

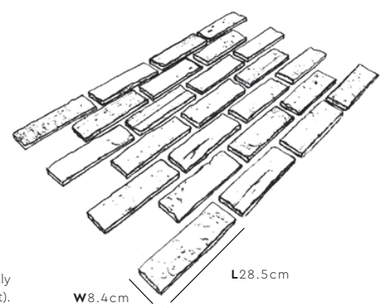


All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.





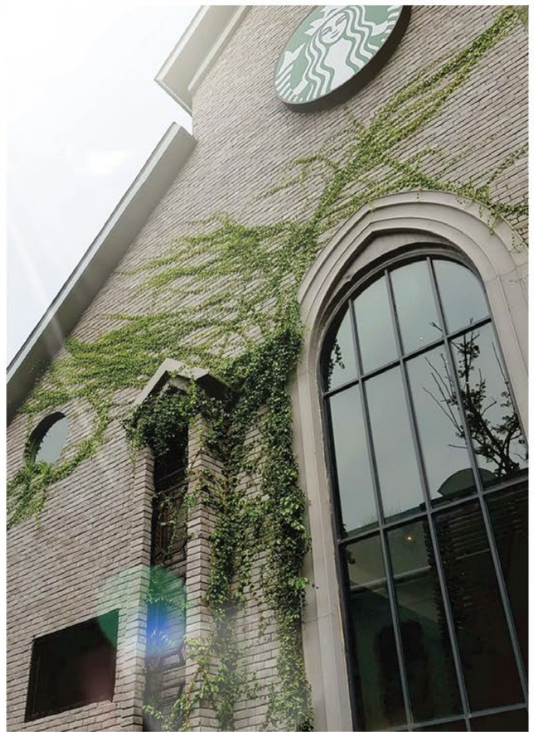





GM-16



GM-01

DS-901 Grouting GM-11





GM-16



GM-01

DS-902 Grouting GM-11





GM-11



GM-01

DS-903 Grouting GM-16






GM-16



GM-01

DS-904 Grouting GM-12

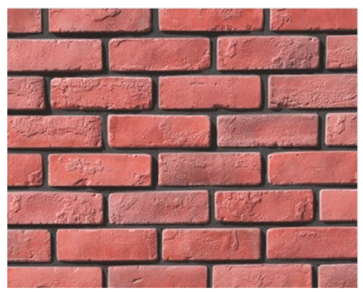



GM-16



GM-11

DS-905 Grouting GM-01





GM-11



GM-01

DS-906 Grouting GM-16

DS-90

Flat Brick:
Coverage (Per Box) : **12.6 ~ 12.9 sqf**
Weight (Per Box) : **21.11 kg**
Pieces (Per Box) : **96 pcs**


Corner Brick:
Coverage (Per Box) : **6.8 ~ 7.2 f**
Weight (Per Box) : **10.53 kg**
Pieces (Per Box) : **30 pcs**

* *Please allow a +/- 5% tolerance for stone size & colour*



Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

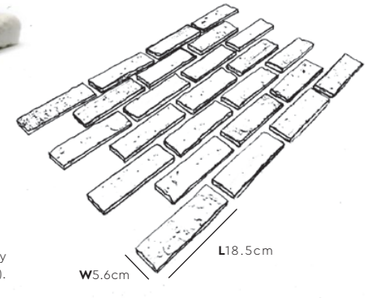


All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.



BK-11|12|13

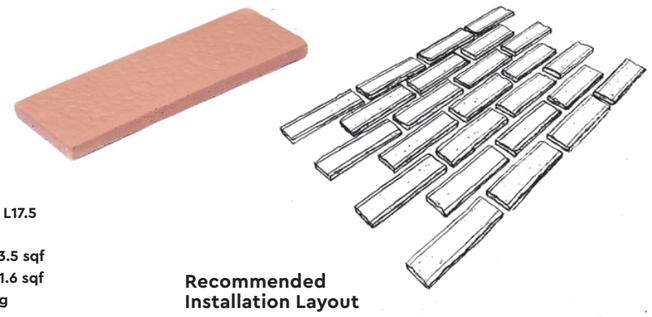

Series	BK-11	BK-12	BK-13
Dimensions (cm) :	W6 x L17.8	W5.8 x L18	W5.7 x L17.5
Coverage (Per Box)			
With Grouting :	13.9 ~ 14.3 sqf	13.7 ~ 14.5 sqf	13.1 ~ 13.5 sqf
Without Grouting :	11.8 ~ 12.0 sqf	11.8 ~ 12.1 sqf	11.2 ~ 11.6 sqf
Weight (Per Box) :	18.46 kg	18.06 kg	19.84 kg
Pieces (Per Box) :	104 pcs	104 pcs	104 pcs

** Please allow a +/- 5% tolerance for stone size & colour*

Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.







GM-12



BK-1101 Grouting GM-16 Without Grouting






GM-12



BK-1102 Grouting GM-16 Without Grouting

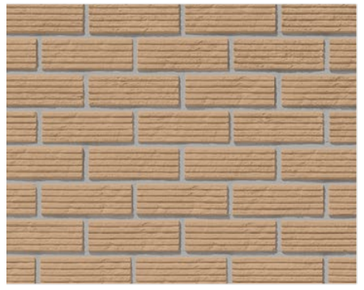




GM-12



BK-1103 Grouting GM-11 Without Grouting

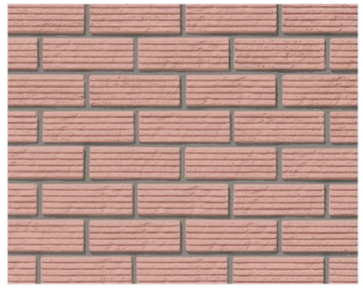



GM-01



BK-1104 Grouting GM-12 Without Grouting






GM-01



BK-1105 Grouting GM-12 Without Grouting

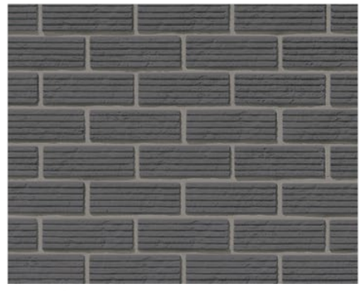



GM-01



BK-1106 Grouting GM-12 Without Grouting

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.









GM-11




BK-1201 Grouting GM-16 Without Grouting






GM-12



BK-1202 Grouting GM-16 Without Grouting

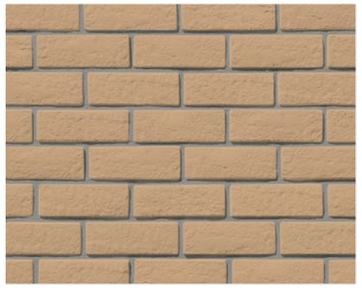




GM-01



BK-1203 Grouting GM-12 Without Grouting

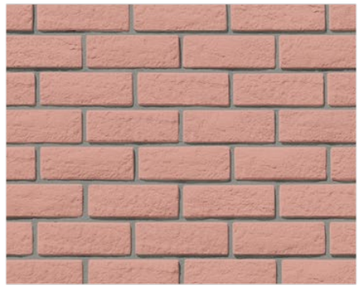



GM-01



BK-1204 Grouting GM-12 Without Grouting





GM-01



BK-1205 Grouting GM-12 Without Grouting





GM-12



BK-1206 Grouting GM-01 Without Grouting

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.





GM-11




BK-1301 Grouting GM-16 Without Grouting






GM-12



BK-1302 Grouting GM-16 Without Grouting

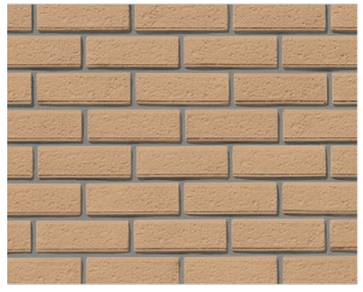




GM-01



BK-1303 Grouting GM-12 Without Grouting

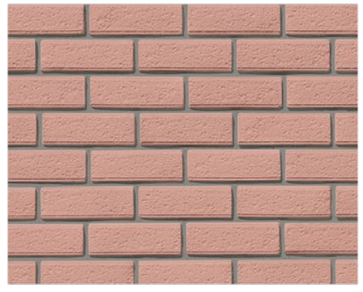



GM-11



BK-1304 Grouting GM-12 Without Grouting





GM-01



BK-1305 Grouting GM-11 Without Grouting





GM-12



BK-1306 Grouting GM-01 Without Grouting

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.











DS-101



DS-102



DS-103



DS-104



DS-105



DS-106

DS-10

Flat Brick:
Coverage (Per Box) : **10.8 ~ 11.2 sqf**
Weight (Per Box) : **26.08 kg**
Pieces (Per Box) : **110 pcs**


Corner Brick:
Coverage (Per Box) : **9.0 ~ 9.2 f**
Weight (Per Box) : **20.06 kg**
Pieces (Per Box) : **56 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*




Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

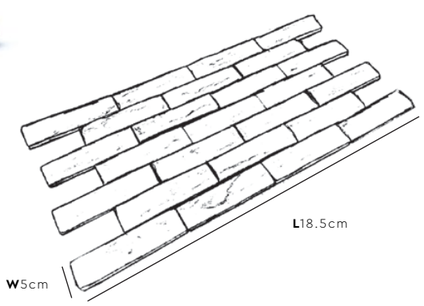

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

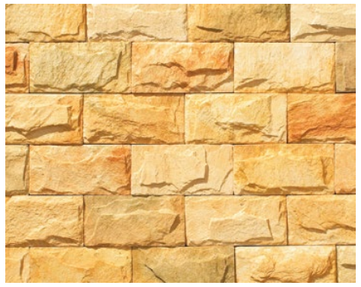

DS-501



DS-502



DS-503



DS-504 (with grouting)



DS-505 (with grouting)

DS-50

Flat Brick:
Coverage (Per Box) : **12.1 ~ 12.5 sqf**
Weight (Per Box) : **25.34 kg**
Pieces (Per Box) : **60 pcs**


Corner Brick:
Coverage (Per Box) : **10.5 ~ 10.7 f**
Weight (Per Box) : **23.46 kg**
Pieces (Per Box) : **32 pcs**

** Please allow a +/- 5% tolerance for stone size & colour*



Recommended Installation Layout

- Arrange the stones in a zig zag pattern.
- Arrange the colors/shades randomly and evenly (you may try laying the stones on the floor first).

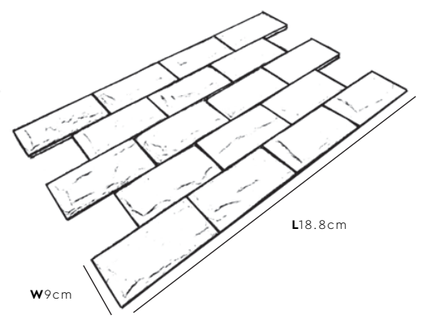

All images shown are for visual reference only. Please be aware that product colors may appear slightly different in print and on various digital screens.

KASTONE® GROUTING

NEW IMPROVED FORMULA:
By protecting against water damage, more resistant to staining, discoloration & deterioration over time.



GM-16 GM-04 GM-03



GM-11 GM-12 GM-01

Coloured, cementitious and sand-based grouting, used to fill and support the joints between stones and bricks during installation. Formulated with coarse silica sand, synthetic resin, colour pigments, and water retentive additives, this durable material is applicable on any dry surface with widths between **4-15 mm**.

NEW IMPROVED FORMULA
Stronger Protection & Resistance
Against Water Damage, Staining, Discoloration & Deterioration.

Features:
- High Durability
- Water Repellent
- Stain & Mould Resistance
- Water Resistant
- Anti-chalking
- Easy Application
- Versatile Colours

Coverage:

Model Code	Coverage (sqf/kg)	Depth (mm)	Width (mm)
AR-30	3.3 ~ 3.6	3	10
BL-61	3.3 ~ 3.6	3	10
BK-71	2.4 ~ 2.6	6 ~ 7	10
BQ-00	2.3 ~ 2.5	5 ~ 6	10
BK-31	2.4 ~ 2.6	6 ~ 7	10
BK-41	2.5 ~ 2.7	6 ~ 7	10
BK-11/12/13	2.4 ~ 2.6	4 ~ 5	10
DS-90	2.4 ~ 2.6	4 ~ 5	10
DS-50	2.4 ~ 2.6	6 ~ 7	10

Packing Size:

Weight	Packing
3.5 kg / pack	4 packs / box
1.0 kg / pack	14 packs / box

KASTONE® EASY

CONSTRUCTION ADHESIVE





KASTONE® EASY – CONSTRUCTION ADHESIVE is an instant grab adhesive sealant based on advanced MS Polymer technology. The instant-grab capability eliminates the need for mechanical support: bracing, nailing, screwing, or other fastening devices.

APPLICABLE ON TILES!
(With Kastone BL or AR Series)
Instant Grab

Features
- Instant Grab
- High Strength
- Primerless
- Interior & Exterior
- Fast & Easy
- Water Resistant

RECOMMENDED FOR D.I.Y

Ideal for SUZUKA® KASTONE® Brick Veneer.

Product Code	Adhesive Usage Length	Adhesive Coverage per tube (m²)	Holding Time
BK-31	6 cm x 2	0.9	6 sec
BK-11	5 cm x 2	1.0	5 sec
BK-12	5 cm x 2	1.0	6 sec
BK-13	5 cm x 2	1.0	5 sec
DS-90	5 cm x 2	0.9	6 sec
DS-10	3.5 cm x 2	0.9	8 sec
BK-71	6 cm x 2	0.9	6 – 8 sec
AR-30	5 cm x 2	1.2	1 – 3 sec max
BL-61	5 cm x 2	1.2	1 – 3 sec max

Usage Tips:
- Tip cutting: diameter **6 mm** slanting.
- Apply & hold veneer on wall for few seconds.
- Applicable on aluminium, wood, metal, tiles, glass or mirror surface.
- Ensure the surface is clean.

SUZUKA® STONE CARE

Topcoat for stone & other masonry surfaces for extra protection and durability.



- **High Gloss Finish:**
  An acrylic solvent-based topcoat allowing colour-enhancement and a glossy finish.

Coverage & Packing:

High Gloss		
1L	4L	18L
75 ~ 108sqf	301 ~ 431sqf	1,356 ~ 1,938sqf

- **Natural Finish:**
  An environmentally-friendly water-based topcoat that maintains the original color.

Coverage & Packing:

Natural		
1L	5L	18L
75 ~ 108sqf	377 ~ 538sqf	1,356 ~ 1,938sqf

Suitable for:
- SUZUKA® KASTONE® & Trowel Stone
- Stone / Brick Veneer
- Natural Stone
- Pebble Wash
- Concrete Imprint
- Bricks

* Not recommended for pre-sealed surfaces or non-porous surfaces, such as ceramic tile, marble, granite, porcelain and terrazzo.

Features
- Easy Application
- UV Resistance
- High Adhesion
- Water, Algae & Fungus Resistance
- Long Lasting & High Endurance
- Stain Resistance & Easy Cleaning

SUZUKA® WALL SEALER PRO

"Make your wall finishes last longer!"



Packing Size: **1L** **5L** **20L**

Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off.

It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Coverage	Drying Time (hour)	
6.5 - 8.5 m²/l/coat	Surface Dry : **1** Hard Dry : **5** Recoating : **5**	Substrate Temperature: **23°C - 26°C**


Features:
- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

Suitable for:
- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Airless Spray		
Nozzle **1.8 - 2.0** mm	Spray Angle Degree **65° - 80°**	Pressure **210** psi/150kg/cm²

KASTONE®


Brick Patterns

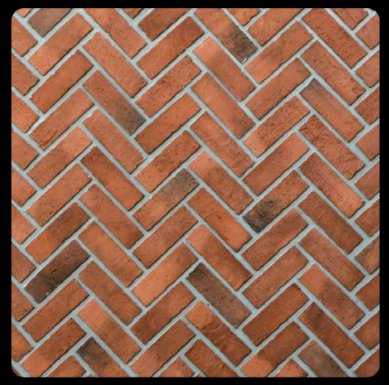

Herringbone



90° Herringbone

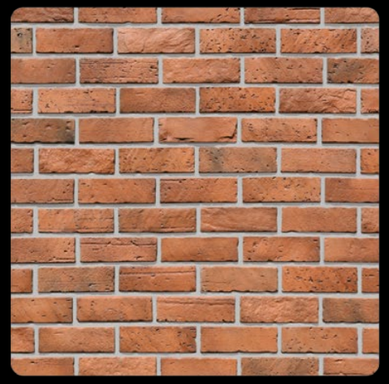

Running Bond



Mosaic



Vertical Stack


KASTONE®

Corner Brick






Application **with** Corner Brick

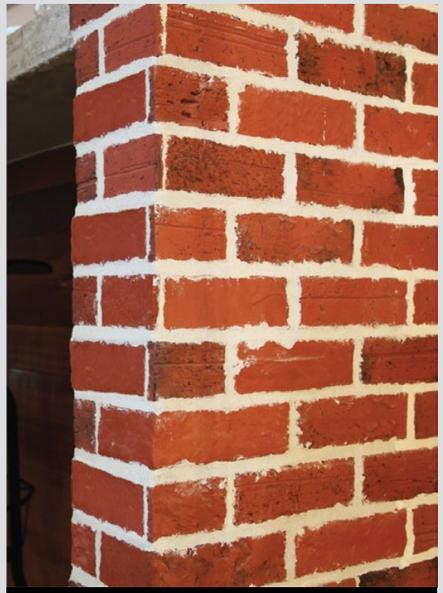


Application **without** Corner Brick

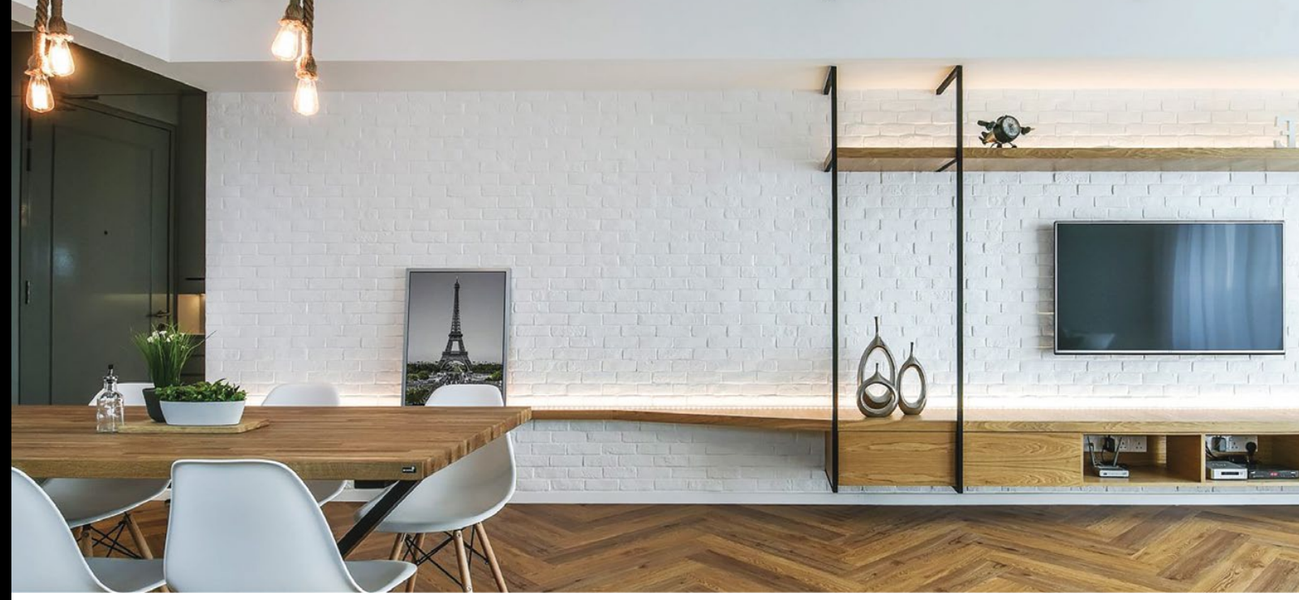

Grouting Techniques

1 Install KASTONE® Brick veneer.




2 Fill the joints with KASTONE® Grouting.




3 Choose your preferred grouting style or finishing.

A | Standard Grouting






1 Ensure the grouting level reaches half the height of the bricks.




2 Flatten the grouting with a stick.

B | Full Grouting






1 Ensure the grouting level reaches the height of the bricks.




2 Flatten the grouting with a stick.

C | Over Grouting






1 Ensure the grouting level protrudes slightly over the height of the bricks.



2 Use a sponge to smear the excess grouting across the edges of the bricks' surfaces.

D | Weep Grouting





1 Ensure the grouting level protrudes slightly over the height of the bricks.

WARNING Remove all **excess or unwanted** groutings while it is still wet. Do not allow the material to cure on the surface.



Installation Instructions



Step 1 – Surface Preparation


A Hack uniformly across the wall (using a an axe, drill, or hammer) to create a rough and pitted texture on the surface.

B Clean the surface to ensure it is free from dirt and dust.




Step 2 – Mortar Application

Apply a generous layer of mortar across the wall using the notched edge trowel, creating a "combed" surface pattern.

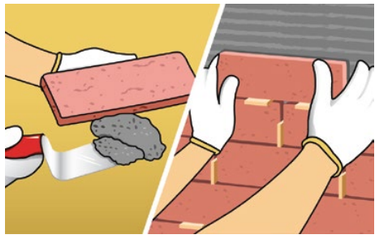

Step 3 – Stone Application

Complete this step starting from the bottom of the wall & moving upwards: Apply a thick layer of mortar onto the back side of a stone. Press the stone firmly onto the mortared wall surface, holding for a few seconds. Use spacers if necessary to ensure a level arrangement.

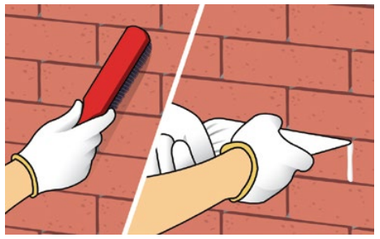


Step 4 – Grouting Application

A Use a dry brush to remove any dust from the surface.

B Using a piping bag, apply KASTONE® Grouting between the joints.

C **WARNING :**
Remove the excess and unwanted groutings before it dries & hardens. *(Refer grouting application techniques, page 32)*

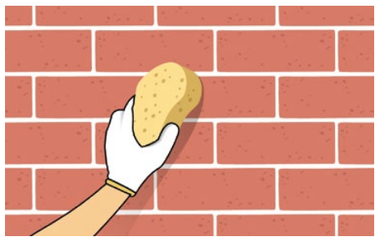


Step 5 – Cleaning Up

Wipe the surface with a damp cloth or sponge.

Tools



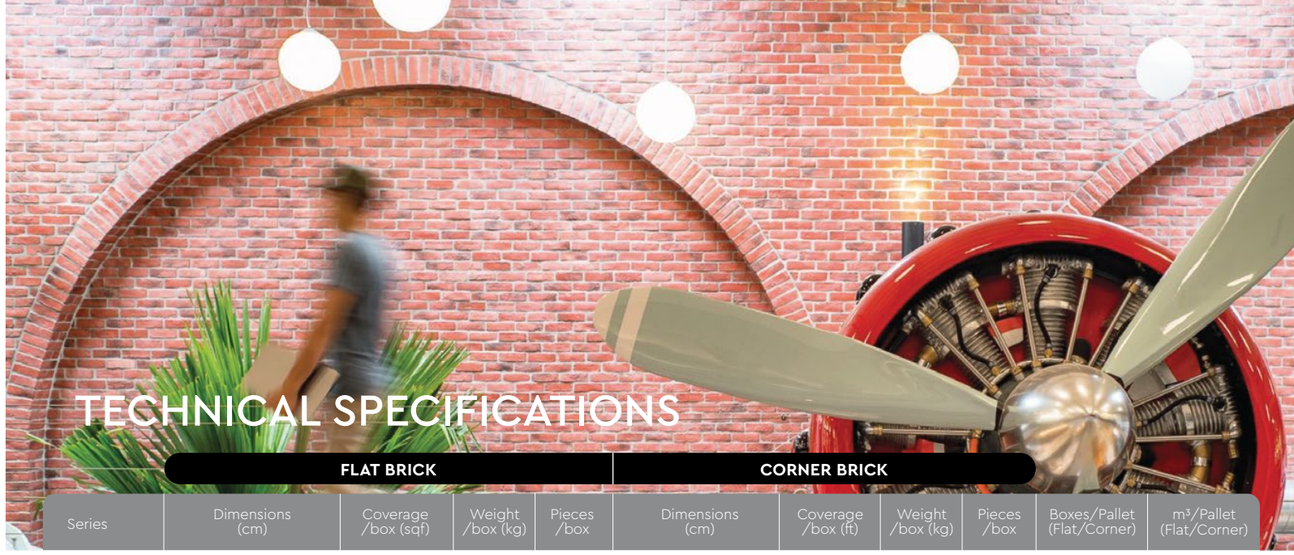


TECHNICAL SPECIFICATIONS

	FLAT BRICK				CORNER BRICK					
Series	Dimensions (cm)	Coverage /box (sqf)	Weight /box (kg)	Pieces /box	Dimensions (cm)	Coverage /box (ft)	Weight /box (kg)	Pieces /box	Boxes/Pallet (Flat/Corner)	m³/Pallet (Flat/Corner)
BK-33	W30.5 x L35.5	6.02 ~ 6.46	17	10	–	–	–	–	24 / –	1.03 / –
BK-34	W19 x L24.6	7.64 ~ 8.50	13	17	–	–	–	–	64 / –	1.11 / –
BK-35	W8.5 x L20.5(A), 12.5(B)	4.35 ~ 4.83	25	16(A), 16(B)	–	–	–	–	32 / –	1.07 / –
BK-36	W7.9 x L21.7	4.15 ~ 4.60	26	25	–	–	–	–	32 / –	1.21 / –
AR-30	W6.4 x L21.7	10.3 ~ 10.5	6.39	60	–	–	–	–	144 / –	1.20 / –
BL-61	W6.4 x L21.7	8.0 ~ 8.2	7.20	46	–	–	–	–	120 / –	1.20 / –
BK-71	W6.4 x L19.4	8.4 ~ 8.6	18.87	55	–	–	–	–	48 / –	1.20 / –
BQ-00	W24 x L40.5	8.3 ~ 8.6	19.50	8	–	–	–	–	48 / –	1.20 / –
BK-41	W8.4 x L28.5	8.6 ~ 8.9	21.57	30	W8.4 x S9.8 x L23.3	4.8 ~ 5.1	14.47	16	48 / 48	1.08 / 1.20
BK-31	W6.5 x L20	7.7 ~ 7.9	14.47	48	W6.5 x S10 x L20.5	5.0 ~ 5.2	10.68	21	64 / 64	1.11 / 1.11
BK-11	W6 x L17.8	13.9 ~ 14.3	18.46	104	–	–	–	–	48 / –	1.20 / –
BK-11 *(Without grouting)*	W6 x L17.8	11.8 ~ 12.0	18.46	104	–	–	–	–	48 / –	1.20 / –
BK-12	W5.8 x L18	13.7 ~ 14.5	18.06	104	–	–	–	–	48 / –	1.20 / –
BK-12 *(Without grouting)*	W5.8 x L18	11.8 ~ 12.1	18.06	104	–	–	–	–	48 / –	1.20 / –
BK-13	W5.7 x L17.5	13.1 ~ 13.5	19.84	104	–	–	–	–	48 / –	1.20 / –
BK-13 *(Without grouting)*	W5.7 x L17.5	11.2 ~ 11.6	19.84	104	–	–	–	–	48 / –	1.20 / –
DS-90	W5.6 x L18.5	12.6 ~ 12.9	21.11	96	W5.6 x S9.5 x L18.5	6.8 ~ 7.2	10.53	30	40 / 40	1.13 / 1.13
DS-50	W9.0 x L18.8	12.1 ~ 12.5	25.34	60	W9.0 x S8.6 x L17.8	10.5 ~ 10.7	23.46	32	32 / 32	1.00 / 1.00
DS-10	W5 x L18.5	10.8 ~ 11.2	26.08	110	W5 x S9.5 x L18	9.0 ~ 9.2	20.06	56	32 / 32	1.00 / 1.00

Notes: Coverage for the BK-11/12/13, BK-31, BK-41, BK-71, BL-61, AR-30, BQ-00, DS-90 & DS-50 series are inclusive of grouting application.
Please allow a +/- 5% tolerance for stone size and colour.

Calculation of Wall Coverage:

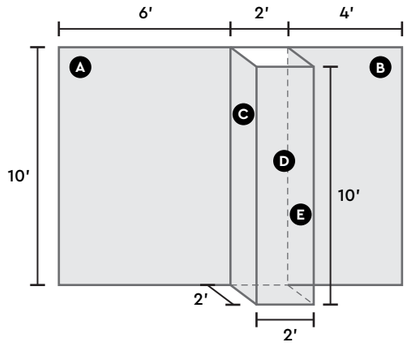

Surface Dimension:

A = 10' x 6' = 60 sqf
B = 10' x 4' = 40 sqf
C = 10' x 2' = 20 sqf
D = 10' x 2' = 20 sqf
E = 10' x 2' = 20 sqf
Total = 160 sqf

Example for BK-31 Series:

Flat = 160sqf - 2(10') (height of corners)
= 140sqf / 7.7 (coverage per box)
= 18 boxes (estimate total box)

Corner = 2(10') / 5.0' (coverage per box)
= 4 boxes (estimate total box)

